

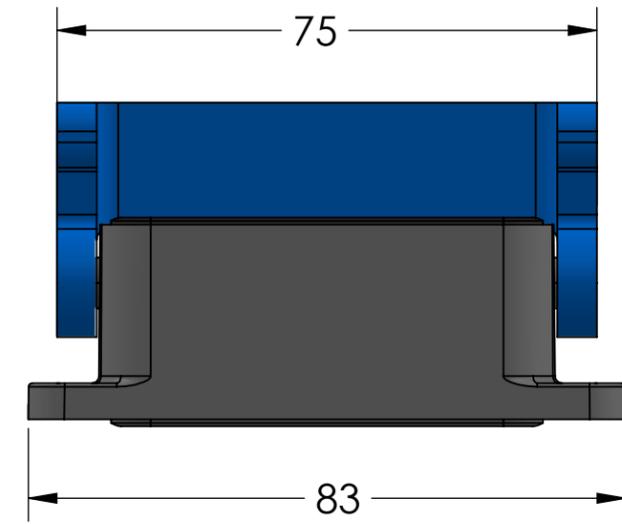
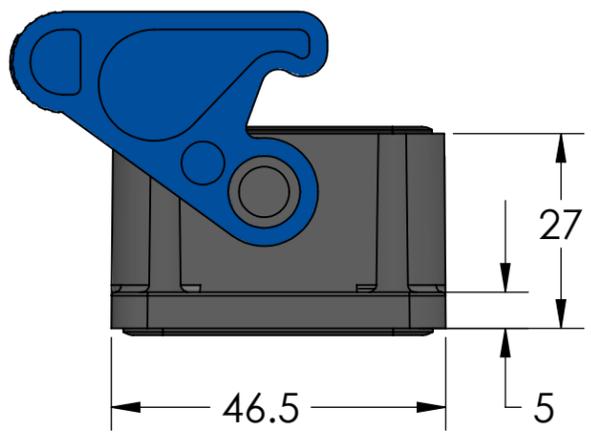


D  
C  
B  
A

D  
C  
B  
A

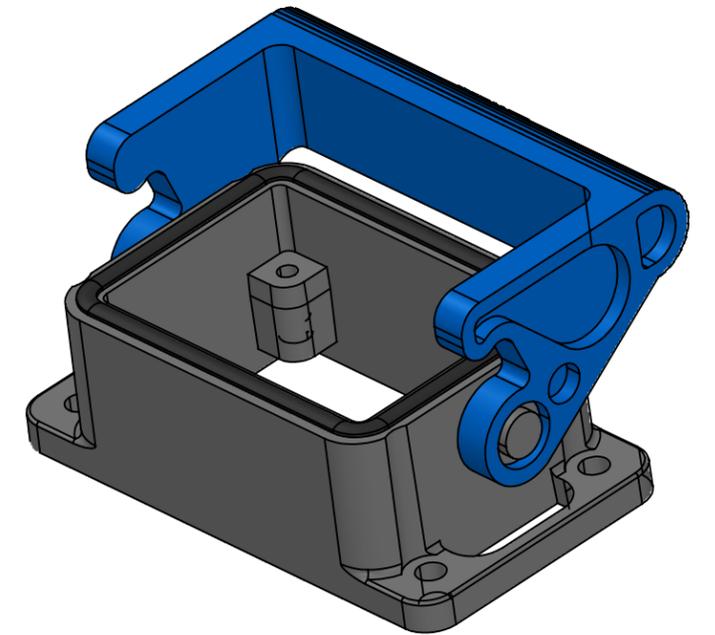

PANEL CUTOUT

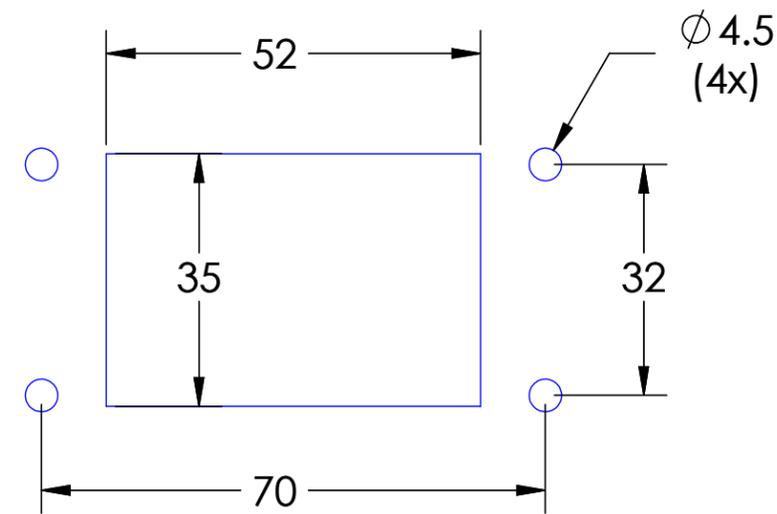

SEAL RATING OF IP 66/69 ONLY ACHIEVED WHEN FULLY LATCHED TO MATING HOOD AND WITH AN APPROPRIATE SEALING GLAND INSTALLED

HYGIC ENCLOSURE T-TYPE / VERSION BULKHEAD MOUNTED HOUSING W/ SINGLE LEVER

TECHNICAL DATA	
OPERATING TEMP RANGE:	-40°C to +70°C
MATERIAL:	THERMOPLASTIC
LEVERS:	THERMOPLASTIC
GASKET:	HNBR
IP DEGREE OF PROTECTION;	IP66/IP69

UNLESS OTHERWISE SPECIFIED:	
DRAWN BY	DCG
DRAWN DATE	12/21/2018
CHECKED BY	ADM
CHECK DATE	12/21/2018
DIMENSIONS ARE IN MM TOLERANCES: FRACTIONAL ±1/64 ANGULAR: MACH ±3° BEND ±5° ONE PLACE DECIMAL ±.2 TWO PLACE DECIMAL ±.1	

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

MATERIAL	COMMENTS:
FINISH	
DO NOT SCALE DRAWING	

<b>MENCOM CORPORATION</b>		
TITLE: 6 PL 2LVR HYGIC PNL MT BS		
SIZE <b>B</b>	DWG. NO. THIH-06L	REV <b>A</b>
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1