


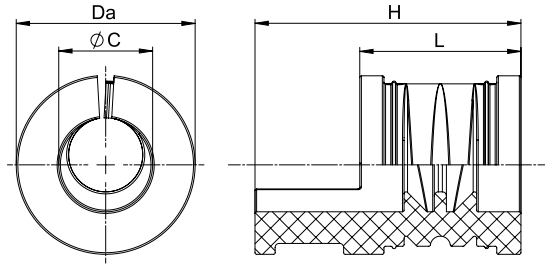

| KADL Grommets |         |      |      |       | Style                                                                              |
|---------------|---------|------|------|-------|------------------------------------------------------------------------------------|
| Part Number   | Ø C mm  | L mm | H mm | Da mm |                                                                                    |
| TK-3-5        | 3-5     | 20   | 33   | 22.2  |  |
| TK-5-7        | 5-7     | 20   | 33   | 22.2  |                                                                                    |
| TK-7-9        | 7-9     | 20   | 33   | 22.2  |                                                                                    |
| TK-9-11       | 9-11    | 20   | 33   | 22.2  |                                                                                    |
| TK-11-13      | 11-13   | 20   | 33   | 22.2  |                                                                                    |
| TK-13-15      | 13-15   | 20   | 33   | 22.2  |                                                                                    |
| TK-15-16      | 15-16.5 | 20   | 33   | 22.2  |                                                                                    |
| TKG           | N/A     | 20   | N/A  | 22.2  |                                                                                    |

Grommets ordered separately.

### Properties

- Accessories for Cable Entry System KADL
- Due to the split grommets, pre-assembled cables with connectors can be inserted into housings and sealed
- For cables with ØC = 3,0 - 16,0 mm
- Clamping range per grommet up to 2 mm
- Strain relief for cables
- Tool-free assembly
- Easy enlargements and adjustments



### Specifications:

Grommet: TPE TPV  
 Temperature: -30°C to +100°C (-22°F to +212°F)

