

Maxi free-standing Beacons / Rotating Mirror Light 883  
**Rotating Mirror Beacon BM 115VAC/DC CL**

Part No.: 883.400.77



| MECHANICAL DATA              |                             |
|------------------------------|-----------------------------|
| Height                       | 218 mm                      |
| Diameter                     | 142 mm                      |
| Materials                    | PC<br>PC/ABS                |
| Dome colour                  | Clear                       |
| Housing colour               | Black                       |
| Protection category          | IP65                        |
| Connection                   | Screw terminals             |
| cross-sectional area maximum | 1,50mm <sup>2</sup> / 16AWG |
| Cable entry                  | Rubber pinch                |
| Cable entry minimum          | d = 5 mm                    |
| Cable entry maximum          | d = 7 mm                    |
| Type of fixing               | Base mounting               |
| Working temperature minimum  | -30°C                       |
| Working temperature maximum  | +50°C                       |
| Weight with packaging        | 753 g                       |
| Product weight               | 667 g                       |
| ELECTRICAL DATA              |                             |
| Operating voltage            | 115V                        |
| Operating voltage type       | AC/DC                       |
| Operating voltage frequency  | 60Hz                        |
| Operating voltage tolerance  | +/- 10%                     |
| Rated operational voltage    | 115 VAC                     |
| Rated operational current    | 350 mA                      |
| Rated inrush current         | <2A                         |
| Protection class             | Protection class 2          |
| Pollution degree             | 3                           |
| Overvoltage category         | II                          |
| Isolation voltage            | Ui = 250V; Uimp = 2.500V    |
| OPTICAL DATA                 |                             |
| Light source                 | halogen bulb                |
| Light colour                 | White                       |
| Service life optical         | 5,000 h minimum             |
| Rotation speed (rpm)         | 180 U/min                   |
| APPROVAL DATA                |                             |
| Conforms with CE             | Yes                         |




For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Maxi free-standing Beacons / Rotating Mirror Light 883  
**Rotating Mirror Beacon BM 115VAC/DC CL**

|                             |     |
|-----------------------------|-----|
| WEEE                        | Yes |
| Conform with ATEX-directive | No  |
| Conforms with CCC           | No  |
| Conforms with UL            | No  |
| Conforms with FCC           | No  |
| Conforms with IC            | No  |
| EAC certificate available   | No  |
| Conforms with AS-I          | No  |
| ICAO Certification          | No  |
| Conforms with GL            | No  |
| Conforms with RoHS CN       | No  |
| Conforms with VdS           | No  |

**DRAWING**

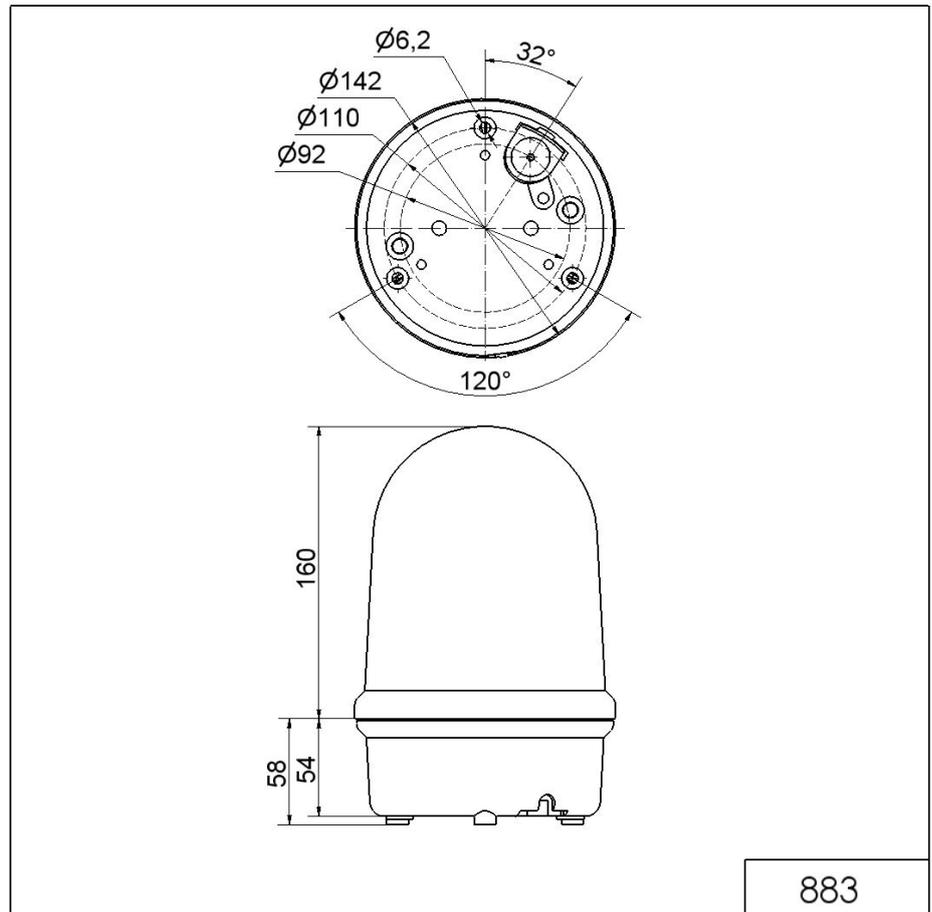

! For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.