

MULTIVERT® 630kVA/910A

Transformer Main Incomers, 690VAC

IEC FUSE SWITCH DISCONNECTORS

NH VERTICAL FUSE SWITCH DISCONNECTOR



MULTIVERT® NH vertical fuse switch disconnectors meet all functions of NH fuse switch disconnectors. They are designed for installation on to bus bars in triple pole arrangements.

MULTIVERT® transformer main incomers 630kVA/910A are for installation on to 185 mm bus bar systems.

They are designed for NH fuse-links “gTr” in accordance with IEC/EN 60269-1, VDE 0636.

The system is a modular system, that allows the installation of individual components. MULTIVERT® offer the user the possibility of fast and easy installation as well as a high degree of protection during installation and maintenance.

TECHNICAL DATA OVERVIEW

Voltage AC	690 VAC
Amper (A)	910 A
SCCR	Ue = AC 400 V; Ie = 910 A 35kA
Mounting	bus bar system 185 mm
Switchability	1 x triple pole
Number of Poles	3

FEATURES & BENEFITS

- Installation on to 185 mm bus bar system
- Suitable for top/bottom cable terminal connections
- With installed cover shroud
- Terminal lugs for cable terminations of large cross sections - multiple termination
- For NH-Fuse links “gTr” in accordance with IEC/EN 60 269-1, VDE 0636
- Safe on load connection/disconnection in accordance with IEC 60947-3

APPLICATIONS

- Transformer substations

STANDARDS

- IEC/EN 60 947-3



MERSEN reserves the right to change, update or correct, without notice, any information contained in this datasheet.

MULTIVERT® 630kVA/910A

Transformer Main Incomers, 690VAC

PRODUCT RANGE



MV6M301K701G

MULTIVERT® transformer main inverter 630 kVA / 910 A 1 x triple pole switching

Catalog number	Item number	Cable termination components	Design	Package	Weight
MV6M301K701G	V1023265	M12 multiple termination Al/Cu max. 300 mm ² round stranded, sectoral stranded (2 cable lugs), Cu max. 150 mm ² round stranded, sectoral stranded (3 cable lugs), M = 32-38 Nm	for NH-fuse links "gTr"	1 piece	13.36 kg

TECHNICAL DATA IN ACCORDANCE WITH EN / IEC 60947

630 kVA / 910 A 1 x triple pole switching

Number of poles/phases	3
Size	3
Conventional free air thermal current with NH-fuse links I_{th}	910 A
Max. power dissipation of fuse links P_n	62 W
Utilization category to IEC/EN 60947-3 $U_e = AC 400 V$; $I_e = 910 A$	AC 21 B
Rated operational voltage U_e	690 V
Rated insulation voltage U_i	1000 V
Rated impulse withstand voltage U_{imp}	8 kV
Rated frequency	50 ... 60 Hz
Degree of protection	IP 20
Degree of pollution	3
Rated duty	uninterrupted duty
Rated conditional short-circuit current with fuse links $U_e = AC 400 V$; $I_e = 910 A$	35 kA
Power dissipation by I_{th} without NH-fuse links	129 W
Installation mode	bus bar installation
Cable terminal connection	
Standard cable terminal	2 x M12
for cable lugs Cu max.	2 x 300 mm ² /phase 3 x 150 mm ² /phase
for cable lugs Al max.	2 x 300 mm ²
for copper bars with max. dimensions	80 x 10 mm


MERSEN reserves the right to change, update or correct, without notice, any information contained in this datasheet.

MULTIVERT® 630kVA/910A

Transformer Main Incomers, 690VAC

DIMENSIONS

MULTIVERT® transformer main incomer 630 kVA/910A (M01103b)

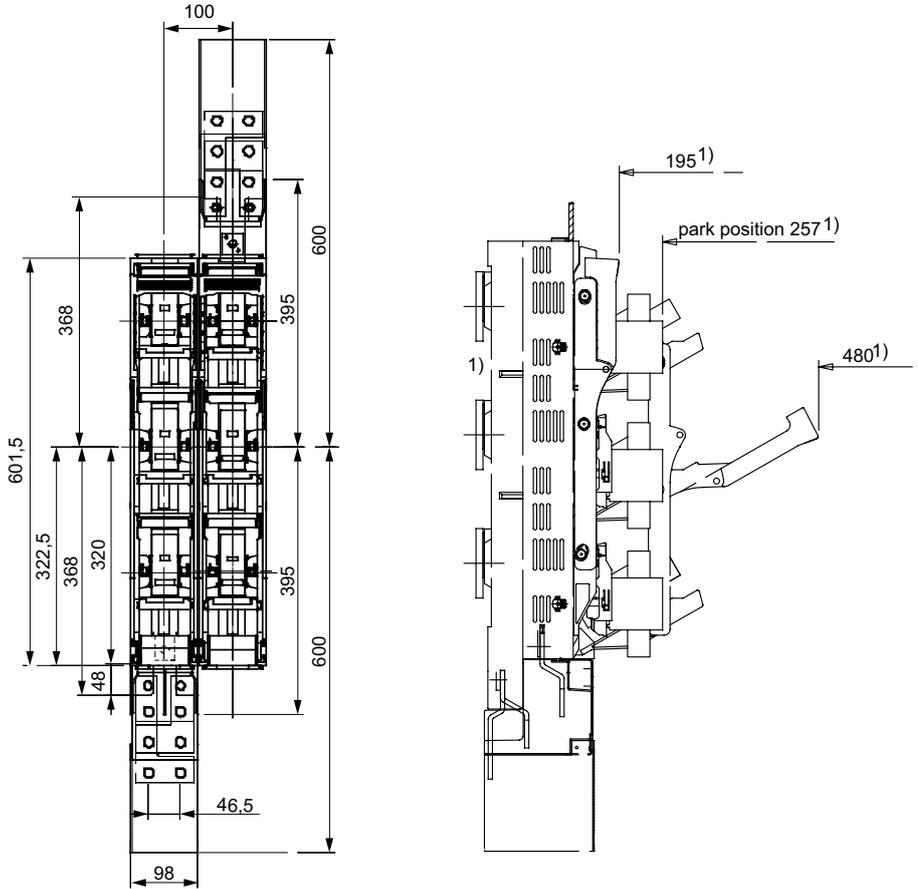

1) dimensions from upper edge of bus bar

Dimensions in mm

ACCESSORIES



1.001.510

MZAW

Covers/level & system adjustment covers

Catalog number	Item number	Design	Package	Weight
1.001.510	K1002280	cover shield to support central cover 1 set = 2 pieces	1 set	0.15 kg
MZAW	D218687	support angle for support of cover plate 1 set = 4 pieces	1 set	27 g

MULTIVERT® 630kVA/910A

Transformer Main Incomers, 690VAC

ACCESSORIES



MZO1LPAP

MZLPAP

1.002.493



1.002.492

1.002.830

1.002.829

Covers/spare way covers

Catalog number	Item number	Design	Application	Package	Weight
MZO1LPAP	C1023410	spare way cover without level adjustment width 50 mm, length 500 mm including fixing material	bus bar system 185 mm	1 piece	60 g
MZLPAP	D1023411	spare way cover width 100 mm, length 612 mm including 2 pieces M12 fixing screws (distance of fixing holes 185 mm)	bus bar system 185 mm	1 piece	0.56 kg
1.002.493	N1002283	spare way cover width 50 mm, length 630 mm for covering of open installation spaces in distribution units with central cover	bus bar system 185 mm	1 piece	0.14 kg
1.002.492	M1002282	spare way cover width 100 mm, length 630 mm for covering of open installation spaces in distribution units with central cover	bus bar system 185 mm	1 piece	0.20 kg
1.002.830	E1023412	spare way cover width 50 mm, length 630 mm with level adjustment 123 mm for bus bar installation, set = cover + fixing set (2 distance pieces, 2 screw rivets)	bus bar system 185 mm	1 set	0.20 kg
1.002.829	F1023413	spare way cover width 100 mm, length 630 mm with level adjustment 123 mm for bus bar installation set = cover + fixing set (2 distance pieces, 2 screw rivets)	bus bar system 185 mm	1 set	0.27 kg

MERSEN reserves the right to change, update or correct, without notice, any information contained in this datasheet.