



MTS 1-PHASE SAFETY TRANSFORMER

P: 40VA IN: 230/400VAC OUT: 24VAC

Single-phase safety transformer
40 VA
Isolation class T 40/B
Other voltages on request.

[Link to Product](#)

Illustration

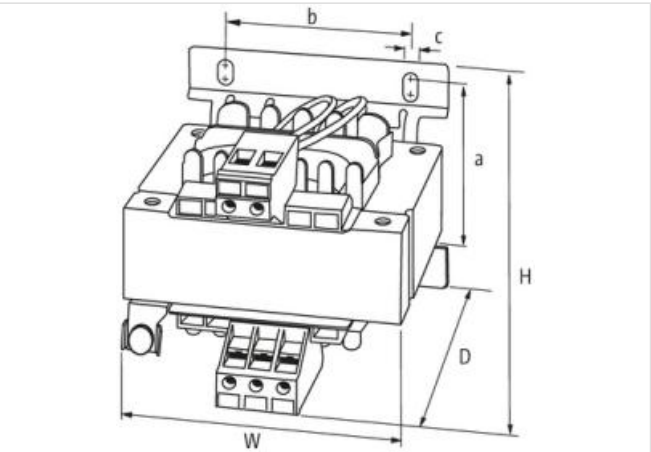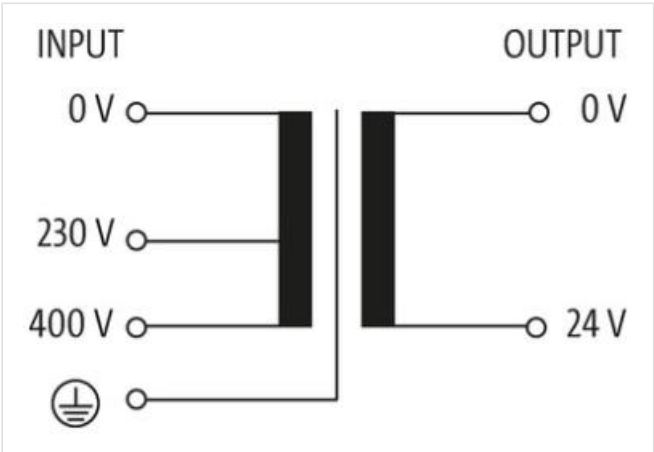

Product may differ from Image



General data	
Standards	EN 61558-1, EN 61558-2-6, EN 62041 category 0
Mounting method	Long-hole mounting or DIN-rail mountable TH35 (EN 60715)
Temperature range	-20...+40 °C (storage temperature -40...+80 °C)
Test isolation voltage	4 kV (prim./sec.)
Drill hole Ø	4.8x8.4 mm
Fixing centers axbxc	56x56x4.8 mm

Dimensions H×W×D 79×78×93 mm

Output

Output voltage	24 V AC (SELV)
Output rating	40 VA

Input

Input voltage	230/400 V AC
Inrush current	1.61 A (230 V AC); 0.94 A (400 V AC)
Short-circuit current	1.83 A (230 V AC); 1.02 A (400 V AC)
Input current	0.24 A (230 V AC); 0.14 A (400 V AC)
Frequency	50...60 Hz

Product article number of manufacturer	86340
--	-------