



MET 1-PHASE CONTROL AND ISOLATION TRANSFORMER

P: 500VA IN: 400VAC+/- 5% OUT: 230VAC

Single-phase - Control and Isolation Transformers  
500 VA  
Isolation class T 60/B

[Link to Product](#)

Illustration

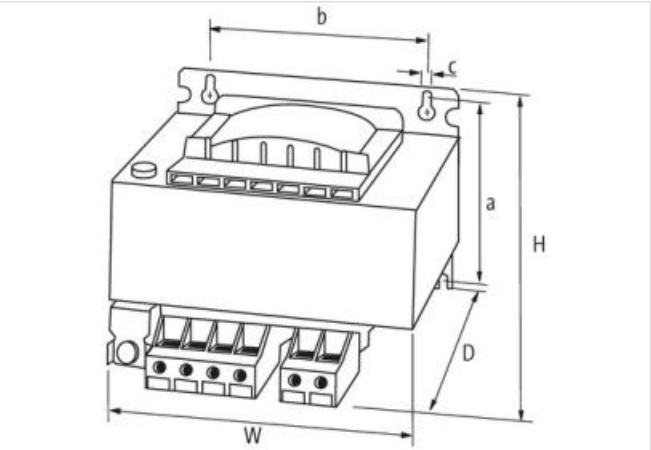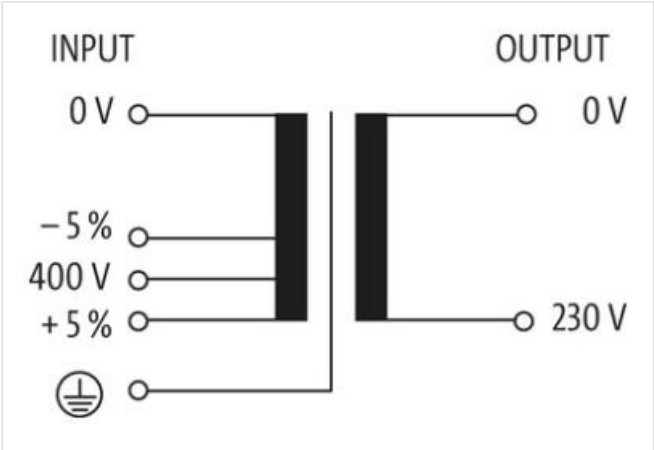

Product may differ from Image



General data	
Standards	EN 61558-1, EN 61558-2-4, EN 62041 category 0
Mounting method	Key-hole mounting
Temperature range	-20...+60 °C (storage temperature -40...+80 °C)
Test isolation voltage	4 kV (prim./sec.)
Drill hole Ø	7x11 mm
Fixing centers a×b×c	90x122x7 mm
Dimensions H×W×D	112.6x150x146 mm

Output	
Output voltage	230 V AC
Output rating	500 VA
Input	
Input voltage	400 V AC $\pm 5\%$
Inrush current	20.22 A (400 V AC)
Short-circuit current	43.35 A (400 V AC)
Input current	1.37 A (400 V AC)
Frequency	50...60 Hz
Product article number of manufacturer	86021