

MST 1-PHASE SAFETY TRANSFORMER


P: 320VA IN: 230/400VAC OUT: 24VAC


Single-phase safety transformer 320 VA Isolation class T 40/B Other voltages on request.

Link to Product

Illustration



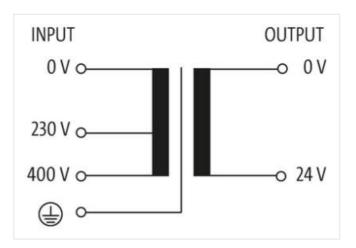



Product may differ from Image





General data	
Standards	EN 61558-1, EN 61558-2-6, EN 62041 category 0
Mounting method	Key-hole mounting
Temperature range	-20+40 °C (storage temperature -40+80 °C)
Test isolation voltage	4 kV (prim./sec.)
Drill hole Ø	5.8×10 mm
Fixing centers a×b×c	74.4×90×5.8 mm



stay connected

Dimensions H×W×D	92×120×122.4 mm
Output	
Output voltage	24 V AC (SELV)
Output rating	320 VA
Input	
Input voltage	230/400 V AC
Inrush current	17.5 A (230 V AC); 10.1 A (400 V AC)
Short-circuit current	28 A (230 V AC); 16.1 A (400 V AC)
Input current	1.52 A (230 V AC); 0.88 A (400 V AC)
Frequency	5060 Hz
Product article number of manufacturer	86326