

MST 1-PHASE CONTROL AND ISOLATION TRANSFORMER


P: 800VA IN: 230/400VAC OUT: 230VAC


Single-phase - Control and Isolation Transformers 800 VA Isolation class T 40/B Other voltages on request.

Link to Product

Illustration



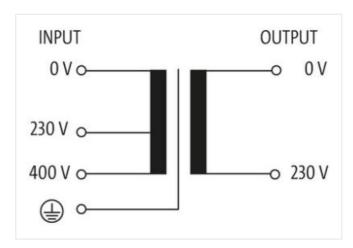



Product may differ from Image





General data		
Standards	EN 61558-1, EN 61558-2-4, EN 62041 category 0	
Mounting method	Key-hole mounting	
Temperature range	-20+40 °C (storage temperature -40+80 °C)	
Test isolation voltage	4 kV (prim./sec.)	
Drill hole Ø	7×11 mm	
Fixing centers a×b×c	107.5×122×7 mm	



Dimensions H×W×D	129.4×150×144.6 mm

Output	
Output voltage	230 V AC
Output rating	800 VA
Input	
Input voltage	230/400 V AC
Inrush current	50 A (230 V AC); 29 A (400 V AC)
Short-circuit current	219 A (110 V AC)
Input current	3.5 A (230 V AC); 2 A (400 V AC)
Frequency	5060 Hz
Product article number of manufacturer	86310