

MET 1-PHASE CONTROL AND ISOLATION TRANSFORMER


P: 3000VA IN: 400VAC+/- 5% OUT: 230VAC


Single-phase - Control and Isolation Transformers 3000 VA Isolation class T 40/B

Link to Product

Illustration



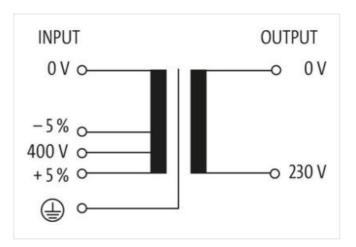



Product may differ from Image





General data		
Standards	EN 61558-1, EN 61558-2-4, EN 62041 category 0	
Mounting method	Long-hole mounting	
Temperature range	-20+40 °C (storage temperature -40+80 °C)	
Test isolation voltage	4 kV (prim./sec.)	
Drill hole Ø	9×14 mm	
Fixing centers a×b×c	200×174×9 mm	
Dimensions H×W×D	195×198×250 mm	

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13



stay connected	
----------------	--

Output		
Output voltage	230 V AC	
Output rating	3000 VA	
Input		
Input voltage	400 V AC ±5%	
Inrush current	208 A (400 V AC)	
Short-circuit current	356 A (400 V AC)	
Input current	7.66 A (400 V AC)	
Frequency	5060 Hz	
Product article number of manufacturer	86091	