


MST single phase safety transformer

P: 250VA IN: 208...550VAC OUT: 24VAC

Single-phase - Control and Isolation Transformers
250 VA
Isolation class T 40/B
Other voltages on request.

[Link to Product](#)

Illustration

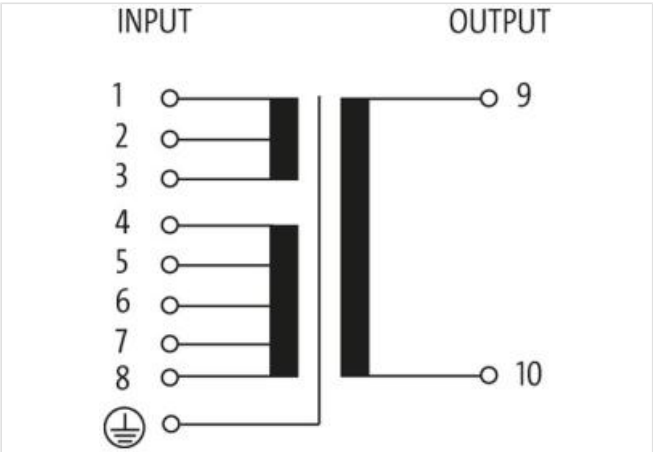

Product may differ from Image



General data	
Standards	EN 61558-1, EN 61558-2-6, EN 62041 category 0
Mounting method	Key-hole mounting
Temperature range	-20...+40 °C (storage temperature -20...+80 °C)
Test isolation voltage	4 kV (prim./sec.)
Drill hole Ø	5.8×10 mm
Fixing centers a×b×c	74.4×90×5.8 mm

Dimensions H×W×D 98×120×134 mm

Output

Output voltage 24 V AC

Output rating 250 VA

Input

Input voltage 208, 230, 380, 400, 420, 440, 460, 480, 500, 525, 550 V AC

Inrush current 25 A (208 V AC); 9.3 A (550 V AC)

Short-circuit current 23 A (208 V AC); 8.7 A (550 V AC)

Input current 1.35 A (208 V AC); 0.51 A (550 V AC)

Frequency 50...60 Hz

Product article number of manufacturer 86185