



MST 1-PHASE SAFETY TRANSFORMER

P: 630VA IN: 230/400VAC+/-15VAC OUT:2x24VAC

Single-phase safety transformer
630 VA
Isolation class T 40/B
Other voltages on request.

Link to Product

Illustration

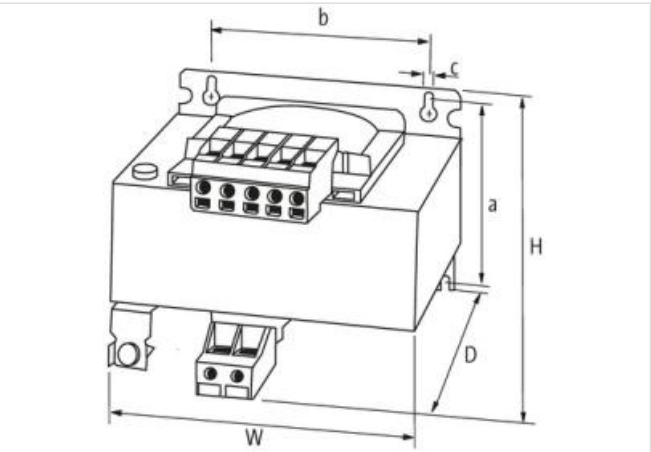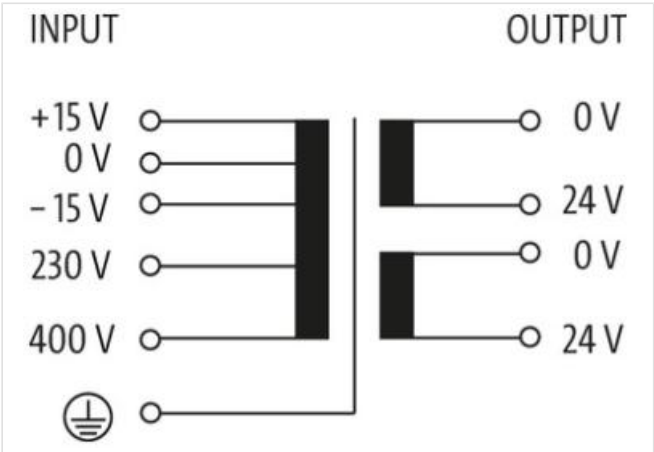

Product may differ from Image



| General data | |
|------------------------|---|
| Standards | EN 61558-1, EN 61558-2-4, EN 62041 category 0 |
| Mounting method | Key-hole mounting |
| Temperature range | -20...+40 °C, no condensation |
| Test isolation voltage | 5.8 kV (prim./sec.) |
| Drill hole Ø | 7×11 mm |
| Fixing centers a×b×c | 90.5×122×7 mm |

Dimensions H×W×D 120.5×150×165 mm

Output

Output voltage 1× 24/1× 48/2× 24 V AC

Output rating 630 VA

Input

Input voltage 230/400 ±15 V AC

Inrush current 56 A (230 V AC); 26 A (400 V AC)

Short-circuit current 68 A (230 V AC); 39 A (400 V AC)

Input current 3 A (230 V AC); 1.7 A (400 V AC)

Frequency 50...60 Hz

Product article number of manufacturer 86463