



MST 1-PHASE CONTROL AND ISOLATION TRANSFORMER

P: 400VA IN: 230/400VAC OUT: 230VAC

Single-phase - Control and Isolation Transformers
400 VA
Spring clamp terminals
Isolation class T 40/B
Other voltages on request.

Link to Product

Illustration

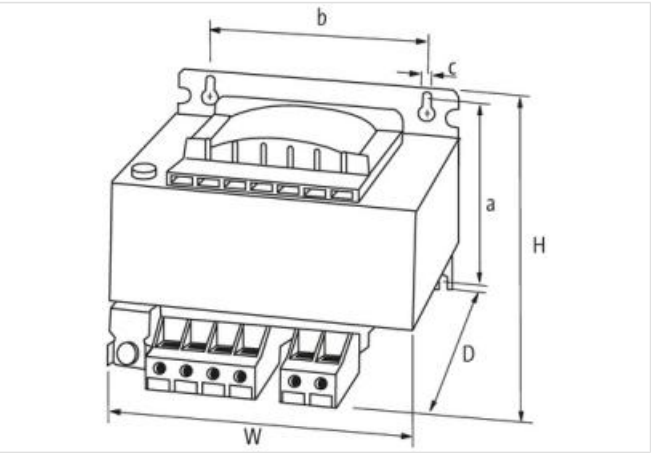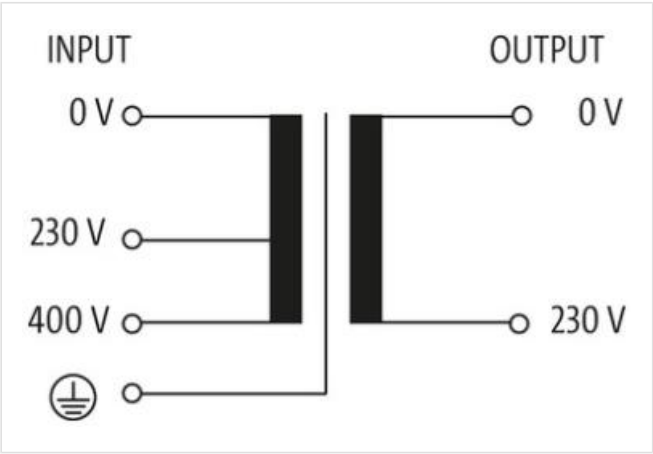

Product may differ from Image



General data	
Standards	EN 61558-1, EN 61558-2-4, EN 62041 category 0
Mounting method	Key-hole mounting
Temperature range	-20...+40 °C (storage temperature -40...+80 °C)
Test isolation voltage	4 kV (prim./sec.)
Drill hole Ø	5.8×10 mm

Fixing centers a×b×c	86.5×90×5.8 mm
Dimensions H×W×D	104.2×120×123 mm

Output

Output voltage	230 V AC
Output rating	400 VA

Input

Input voltage	230/400 V AC
Inrush current	52.3 A (230 V AC); 30.2 A (400 V AC)
Short-circuit current	43 A (230 V AC); 24.9 A (400 V AC)
Input current	1.95 A (230 V AC); 1.1 A (400 V AC)
Frequency	50...60 Hz

Product article number of manufacturer	6686307
--	---------