


MST 1-PHASE CONTROL AND ISOLATION TRANSFORMER

P: 500VA IN: 230/400 +/- 15VAC OUT: 230VAC

Single-phase - Control and Isolation Transformers
500 VA
Isolation class T 40/B
Other voltages on request.

Link to Product

Illustration

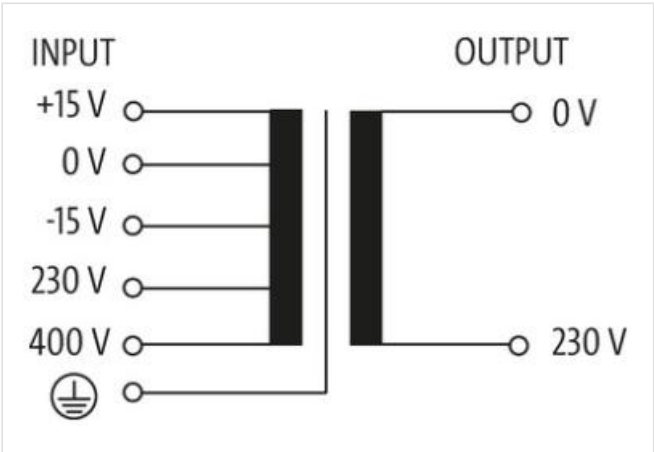

Product may differ from Image

General data	
Standards	EN 61558-2-4, EN 62041 category 0
Mounting method	Key-hole mounting
Temperature range	-20...+40 °C (storage temperature -40...+80 °C)
Test isolation voltage	5.8 kV (prim./sec.)
Fixing centers a×b×c	87×104×5.8 mm
Dimensions H×W×D	108×135×132 mm
Output	
Output voltage	230 V AC
Output rating	500 VA
Input	

Input voltage	230/400 \pm 15 V AC
Inrush current	25 A (230 V AC); 15 A (400 V AC)
Short-circuit current	52 A (230 V AC); 30 A (400 V AC)
Input current	2.4 A (230 V AC); 1.4 A (400 V AC)
Frequency	50...60 Hz
Product article number of manufacturer	86378