



MST 1-PHASE CONTROL AND ISOLATION TRANSFORMER

P: 500VA IN: 230/400VAC OUT: 230VAC

Single-phase - Control and Isolation Transformers  
500 VA  
Spring clamp terminals  
Isolation class T 40/B  
Other voltages on request.

Link to Product

Illustration

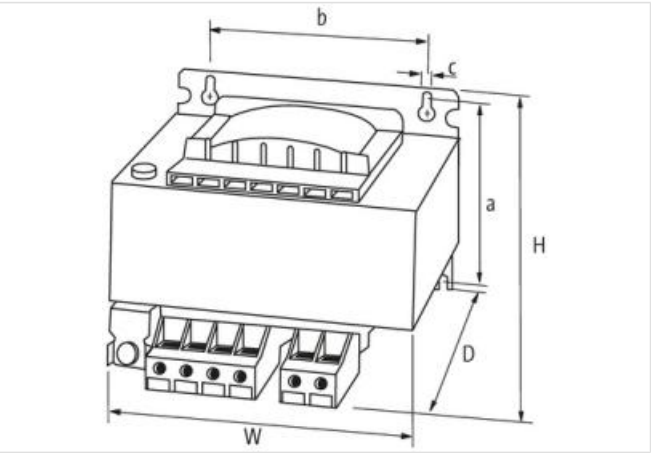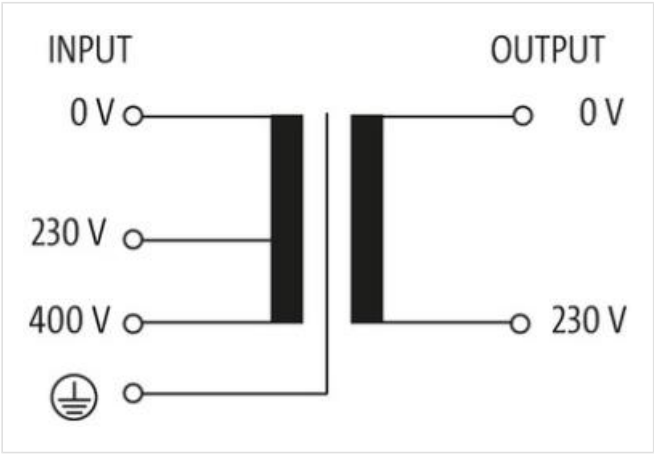

Product may differ from Image



General data	
Standards	EN 61558-2-4, EN 62041 category 0
Mounting method	Key-hole mounting
Temperature range	-20...+40 °C (storage temperature -40...+80 °C)
Test isolation voltage	4 kV (prim./sec.)
Drill hole Ø	5.8x10 mm

Fixing centers a×b×c	87×104×5.8 mm
Dimensions H×W×D	108×135×133.6 mm

**Output**

Output voltage	230 V AC
Output rating	500 VA

**Input**

Input voltage	230/400 V AC
Inrush current	28.1 A (230 V AC); 16.3 A (400 V AC)
Short-circuit current	54 A (230 V AC); 31.2 A (400 V AC)
Input current	2.4 A (230 V AC); 1.4 A (400 V AC)
Frequency	50...60 Hz

Product article number of manufacturer	6686308
--	---------