



MST 1-PHASE CONTROL AND ISOLATION TRANSFORMER

P: 630VA IN: 230/400VAC OUT: 230VAC

Single-phase - Control and Isolation Transformers
630 VA
Spring clamp terminals
Isolation class T 40/B
Other voltages on request.

Link to Product

Illustration

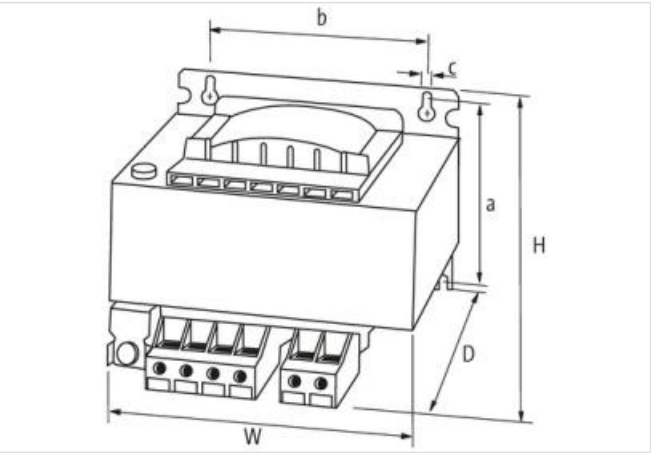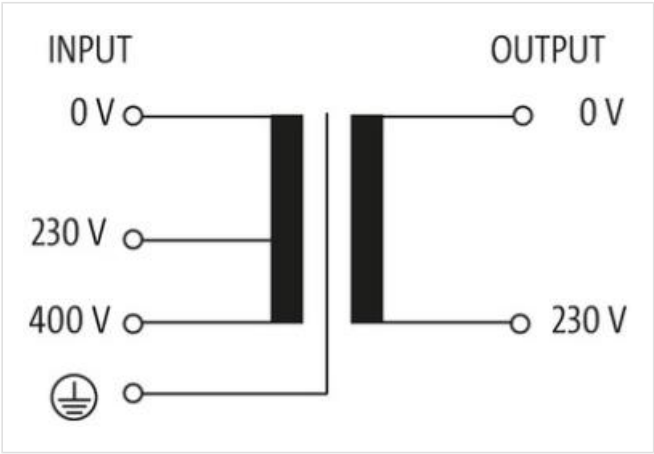

Product may differ from Image



General data	
Standards	EN 61558-1, EN 61558-2-4, EN 62041 category 0
Mounting method	Key-hole mounting
Temperature range	-20...+40 °C (storage temperature -40...+80 °C)
Test isolation voltage	4 kV (prim./sec.)
Drill hole Ø	7×11 mm

Fixing centers a×b×c	90.6×122×7 mm
Dimensions H×W×D	112.5×150×144.6 mm

Output

Output voltage	230 V AC
Output rating	630 VA

Input

Input voltage	230/400 V AC
Inrush current	37 A (230 V AC); 21 A (400 V AC)
Short-circuit current	77 A (230 V AC); 44 A (400 V AC)
Input current	2.95 A (230 V AC); 1.7 A (400 V AC)
Frequency	50...60 Hz

Product article number of manufacturer	6686309
--	---------