

## MET 1-PHASE CONTROL AND ISOLATION TRANSFORMER


P: 4000VA IN: 230VAC+/- 5% OUT: 230VAC


Single-phase - Control and Isolation Transformers 4000 VA Isolation class T 40/B

## **Link to Product**

## Illustration



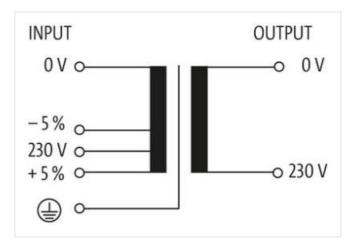



Product may differ from Image





General data	
Standards	EN 61558-1, EN 61558-2-4, EN 62041 category 0
Mounting method	Long-hole mounting
Temperature range	-20+40 °C (storage temperature -40+80 °C)
Test isolation voltage	4 kV (prim./sec.)
Drill hole Ø	9×14 mm
Fixing centers a×b×c	200×174×9 mm
Dimensions H×W×D	206×198×250 mm

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13



## stay connected

Output		
Output voltage	230 V AC	
Output rating	4000 VA	
Input		
Input voltage	219 V;230 V;242 V	
Inrush current	337 A (230 V AC)	
Short-circuit current	807.5 A (230 V AC)	
Input current	18 A (230 V AC)	
Frequency	5060 Hz	
Product article number of manufacturer	86110	