



MST 1-PHASE CONTROL AND ISOLATION TRANSFORMER

P: 1600VA IN: 230/400VAC +/- 15VAC OUT: 2x115VAC

Single-phase - Control and Isolation Transformers
1600 VA
Isolation class T 40/B

[Link to Product](#)

Illustration

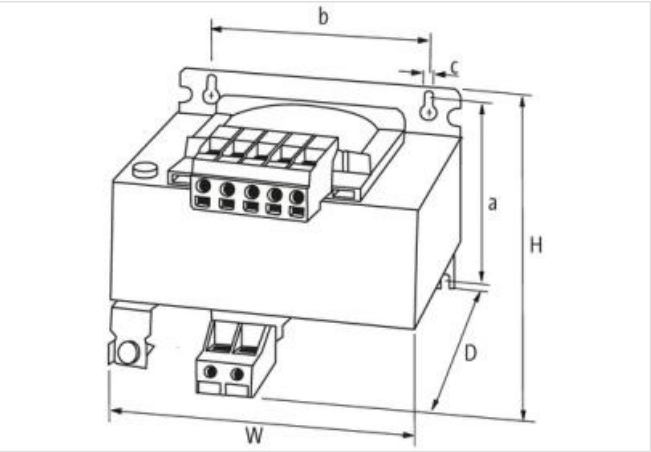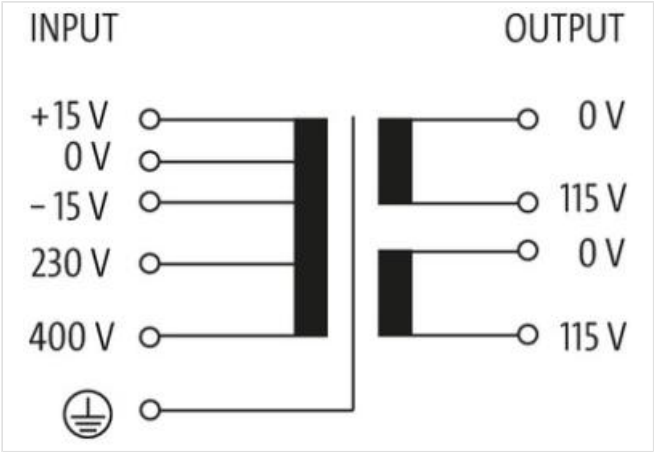

Product may differ from Image



General data	
Standards	EN 61558-1, EN 61558-2-4, EN 62041 category 0
Mounting method	Key-hole mounting
Temperature range	-20...+40 °C, no condensation
Test isolation voltage	5.8 kV (prim./sec.)
Drill hole Ø	7×11 mm
Fixing centers a×b×c	141.5×135×7 mm

Dimensions H×W×D 168×174×163 mm

Output

Output voltage	1× 230, 1× 115, 2× 115 V AC
Output rating	1600 VA

Input

Input voltage	230/400 ±15 V AC
Inrush current	135 A (230 V AC); 70 A (400 V AC)
Short-circuit current	285 A (230 V AC); 169 A (400 V AC)
Input current	7.3 A (230 V AC); 4.2 A (400 V AC)
Frequency	50...60 Hz

Product article number of manufacturer	86485
--	-------