



MST 1-PHASE CONTROL AND ISOLATION TRANSFORMER

P: 2500VA IN: 230/400VAC +/- 15VAC OUT: 2x115VAC

Single-phase - Control and Isolation Transformers
2500 VA
Isolation class T 40/B

[Link to Product](#)

Illustration

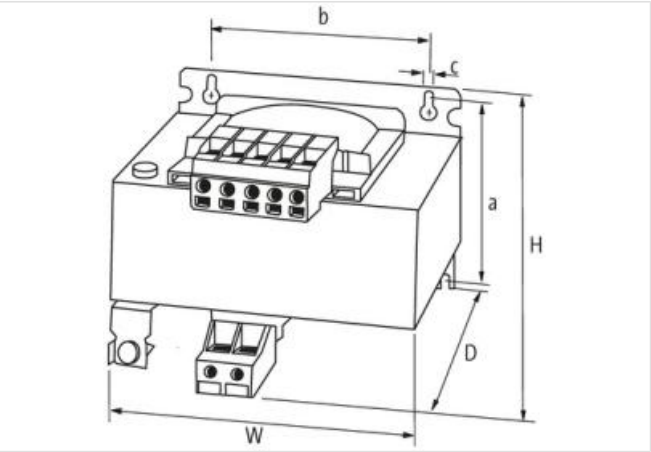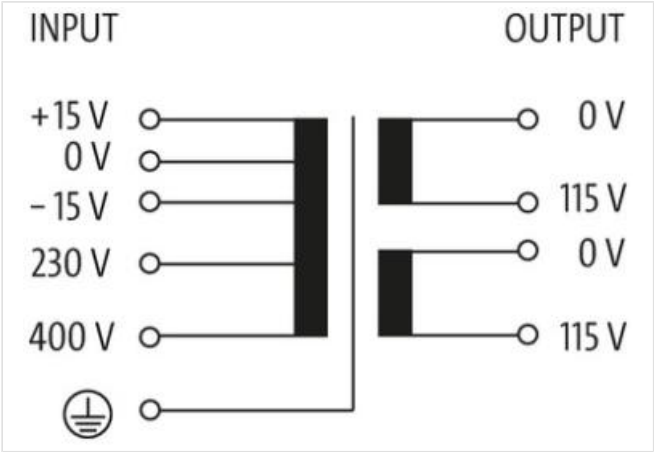

Product may differ from Image



General data	
Standards	EN 61558-1, EN 61558-2-4, EN 62041 category 0
Mounting method	Long-hole mounting
Temperature range	-20...+40 °C, no condensation
Test isolation voltage	5.8 kV (prim./sec.)
Drill hole Ø	10×18 mm
Fixing centers a×b×c	150×150×10 mm

Dimensions H×W×D 182×192×196 mm

Output

Output voltage 1× 230, 1× 115, 2× 115 V AC

Output rating 2500 VA

Input

Input voltage 230/400 ±15 V AC

Inrush current 234 A (230 V AC); 107 A (400 V AC)

Short-circuit current 532 A (230 V AC); 302 A (400 V AC)

Input current 11.4 A (230 V AC); 6.6 A (400 V AC)

Frequency 50...60 Hz

Product article number of manufacturer 86486