

MET 1-PHASE SAFETY TRANSFORMER


P: 630VA IN: 400VAC+/- 5% OUT: 24VAC


Single-phase safety transformer 630 VA Isolation class T 60/B

Link to Product

Illustration



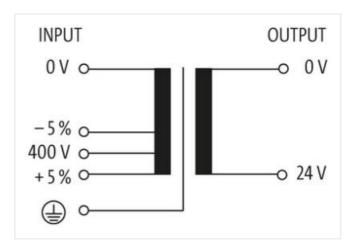



Product may differ from Image





General data		
Standards	EN 61558-1, EN 61558-2-6, EN 62041 category 0	
Mounting method	Key-hole mounting	
Temperature range	-20+60 °C (storage temperature -40+80 °C)	
Test isolation voltage	4 kV (prim./sec.)	
Drill hole Ø	7×11 mm	
Fixing centers a×b×c	107.5×122×7 mm	
Dimensions H×W×D	129×150×148 mm	

The information in this brochure has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13



stay connecte	d
---------------	---

Output		
Output voltage	24 V AC (SELV)	
Output rating	630 VA	
Input		
Input voltage	400 V AC ±5%	
Inrush current	43.4 A (400 V AC)	
Short-circuit current	47.7 A (400 V AC)	
Input current	1.71 A (400 V AC)	
Frequency	5060 Hz	
Product article number of manufacturer	86034	