

MET 1-PHASE CONTROL AND ISOLATION TRANSFORMER


P: 1500VA IN: 230VAC+/- 5% OUT: 230VAC


Single-phase - Control and Isolation Transformers 1500 VA Spring clamp terminals Isolation class T 60/B

Link to Product

Illustration



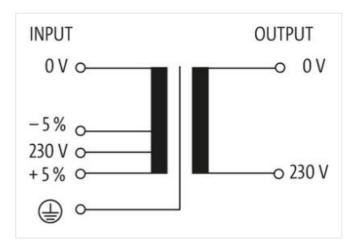



Product may differ from Image



General data		
Standards	EN 61558-1, EN 61558-2-4, EN 62041 category 0	
Mounting method	Key-hole mounting	
Temperature range	-20+60 °C (storage temperature -40+80 °C)	
Test isolation voltage	4 kV (prim./sec.)	
Drill hole Ø	7×11 mm	
Fixing centers a×b×c	141.5×135×7 mm	

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13



Dimensions H×W×D	168×174×162 mm
Output	
Output voltage	230 V AC
Output rating	1500 VA
Input	
Input voltage	230 V AC ±5%
Inrush current	85.07 A (230 V AC)
Short-circuit current	358.1 A (230 V AC)
Input current	6.9 A (230 V AC)
Frequency	5060 Hz
Product article number of manufacturer	6686060
i roduct article number of manufacturer	000000