



MTS 1-PHASE CONTROL AND ISOLATION TRANSFORMER

P: 160VA IN: 230/400VAC +/- 15VAC OUT: 230VAC

Single-phase - Control and Isolation Transformers
160 VA
Isolation class T 40/B
Spring clamp terminals
Other voltages on request.

Link to Product

Illustration

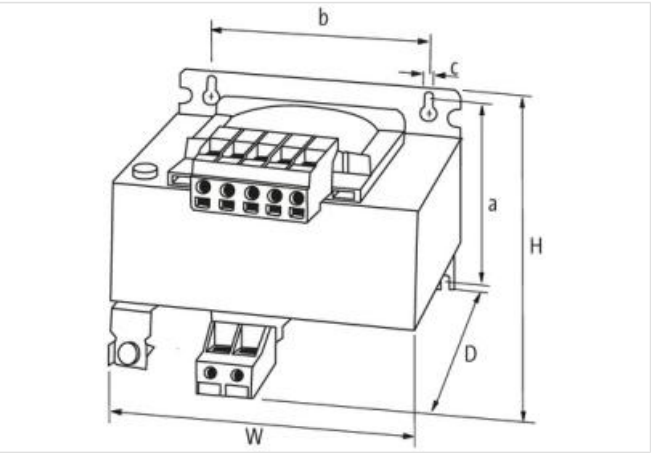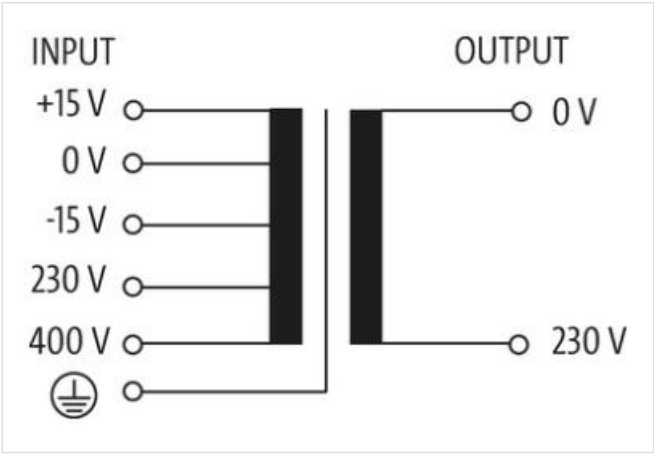

Product may differ from Image



General data	
Standards	EN 61558-1, EN 61558-2-4, EN 62041 category 0
Mounting method	Long-hole mounting or DIN-rail mountable TH35 (EN 60715)
Temperature range	-20...+40 °C (storage temperature -40...+80 °C)
Test isolation voltage	4 kV (prim./sec.)
Drill hole Ø	4.8x8.4 mm

Fixing centers a×b×c	86.5×84×4.8 mm
----------------------	----------------

Dimensions H×W×D	101×96×106 mm
------------------	---------------

Output

Output voltage	230 V AC
----------------	----------

Output rating	160 VA
---------------	--------

Input

Input voltage	230/400 ±15 V AC
---------------	------------------

Inrush current	6 A (230 V AC); 3.46 A (400 V AC)
----------------	-----------------------------------

Short-circuit current	9.5 A (230 V AC); 5.5 A (400 V AC)
-----------------------	------------------------------------

Input current	0.78 A (230 V AC); 0.45 A (400 V AC)
---------------	--------------------------------------

Frequency	50...60 Hz
-----------	------------

Product article number of manufacturer	6686369
--	---------