



**MET 1-PHASE CONTROL AND ISOLATION TRANSFORMER**

P: 3000VA IN: 230VAC+/- 5% OUT: 230VAC

Single-phase - Control and Isolation Transformers  
3000 VA  
Spring clamp terminals  
Isolation class T 40/B

[Link to Product](#)

**Illustration**

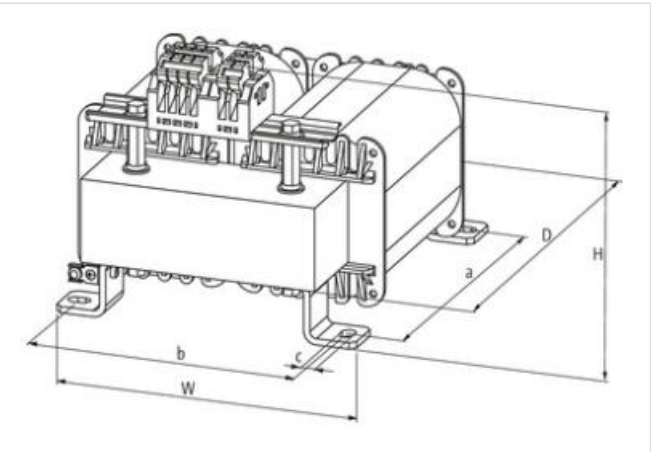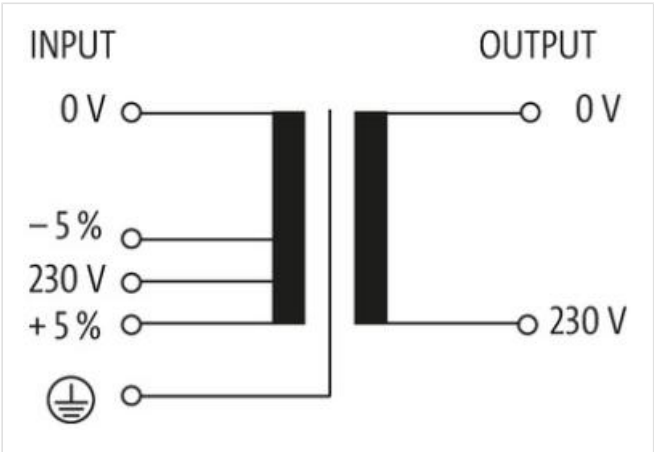

Product may differ from Image



General data	
Standards	EN 61558-1, EN 61558-2-4, EN 62041 category 0
Mounting method	Long-hole mounting
Temperature range	-20...+40 °C (storage temperature -40...+80 °C)
Test isolation voltage	4 kV (prim./sec.)
Drill hole Ø	9x14 mm
Fixing centers a×b×c	200×174×9 mm

Dimensions H×W×D 195×198×250 mm

**Output**

Output voltage 230 V AC

Output rating 3000 VA

**Input**

Input voltage 230 V AC ±5%

Inrush current 209.9 A (230 V AC)

Short-circuit current 623.9 A (230 V AC)

Input current 13.6 A (230 V AC)

Frequency 50...60 Hz

Product article number of manufacturer 6686090