



MST 1-PHASE SAFETY TRANSFORMER

P: 1600VA IN: 230/400VAC+-15VAC OUT:2x24VAC

Single-phase safety transformer
1600 VA
Isolation class T 40/B

[Link to Product](#)

Illustration

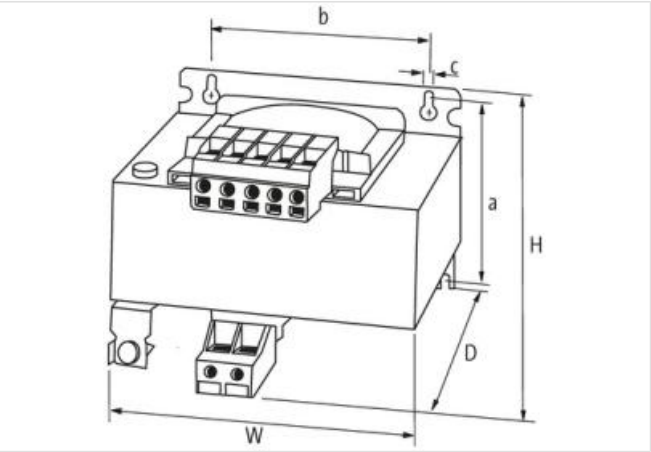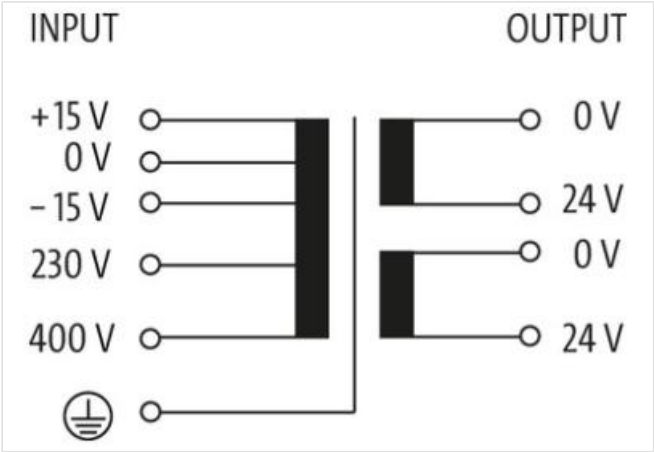

Product may differ from Image



| General data | |
|------------------------|---|
| Standards | EN 61558-1, EN 61558-2-4, EN 62041 category 0 |
| Mounting method | Key-hole mounting |
| Temperature range | -20...+40 °C, no condensation |
| Test isolation voltage | 5.8 kV (prim./sec.) |
| Drill hole Ø | 7×11 mm |
| Fixing centers a×b×c | 141.5×135×7 mm |

Dimensions H×W×D 168×174×222 mm

Output

Output voltage 1 × 24/1 × 48/2 × 24 V AC

Output rating 1600 VA

Input

Input voltage 230/400 ±15 V AC

Inrush current 135 A (230 V AC); 69 A (400 V AC)

Short-circuit current 275 A (230 V AC); 163 A (400 V AC)

Input current 7.3 A (230 V AC); 4.2 A (400 V AC)

Frequency 50...60 Hz

Product article number of manufacturer 86465