



MTS 1-PHASE CONTROL AND ISOLATION TRANSFORMER

P: 40VA IN: 230/400VAC +/- 15VAC OUT: 230VAC

Single-phase - Control and Isolation Transformers  
40 VA  
Isolation class T 40/B  
Spring clamp terminals  
Other voltages on request.

Link to Product

Illustration

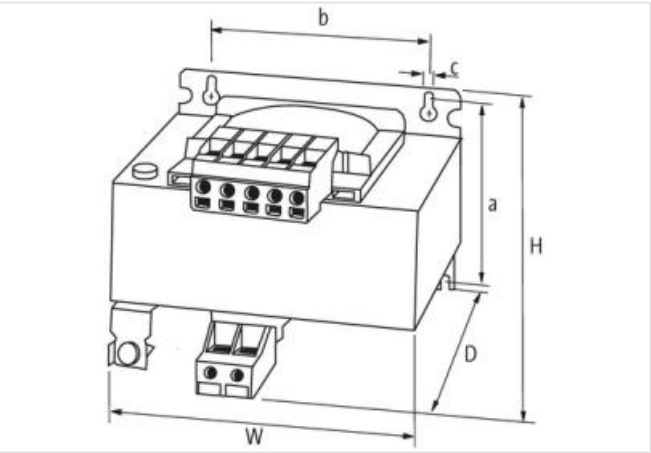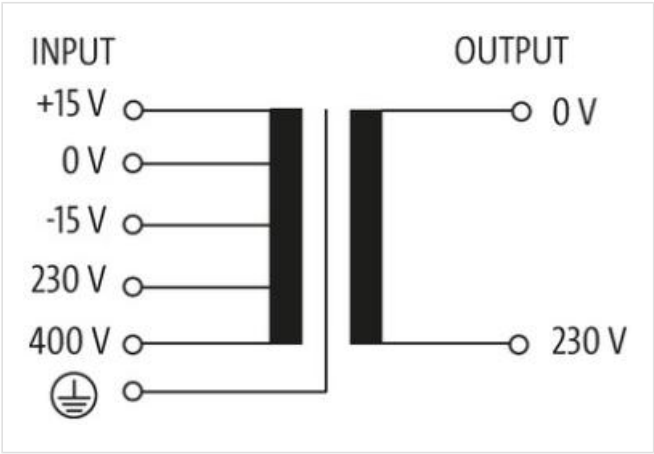

Product may differ from Image



General data	
Standards	EN 61558-1, EN 61558-2-4, EN 62041 category 0
Mounting method	Long-hole mounting or DIN-rail mountable TH35 (EN 60715)
Temperature range	-20...+40 °C (storage temperature -40...+80 °C)
Test isolation voltage	4 kV (prim./sec.)
Drill hole Ø	4.8x8.4 mm

Fixing centers a×b×c	56×56×4.8 mm
----------------------	--------------

Dimensions H×W×D	79×78×93 mm
------------------	-------------

**Output**

Output voltage	230 V AC
----------------	----------

Output rating	40 VA
---------------	-------

**Input**

Input voltage	230/400 ±15 V AC
---------------	------------------

Inrush current	1.64 A (230 V AC); 0.94 A (400 V AC)
----------------	--------------------------------------

Short-circuit current	1.88 A (230 V AC); 1.08 A (400 V AC)
-----------------------	--------------------------------------

Input current	0.24 A (230 V AC); 0.138 A (400 V AC)
---------------	---------------------------------------

Frequency	50...60 Hz
-----------	------------

Product article number of manufacturer	6686366
--	---------