



MCS-B POWER SUPPLY 1-PHASE,

IN: 90-265VAC OUT: 24V/1,3ADC

INPUT: 90...265 V AC
OUTPUT: 24 V DC +3/-1%
Current: 1.3 A

Link to Product

Illustration

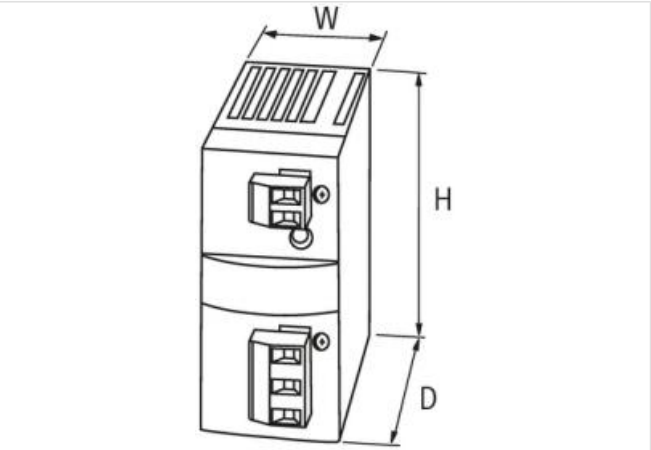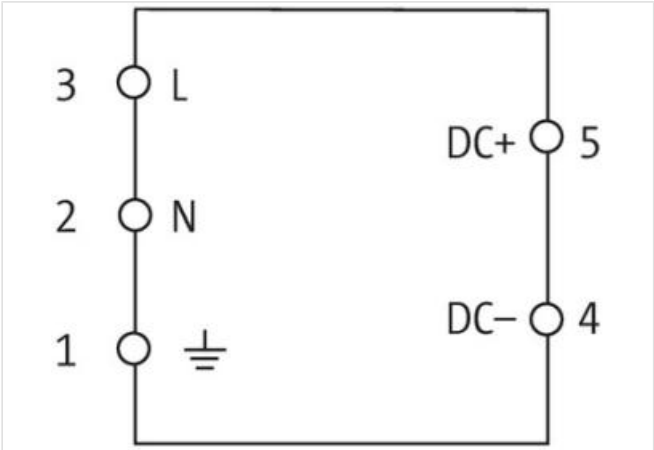

Product may differ from Image



General data	
Standards	IEC 61010-2-201, EN 61204-3, EN 55022 B, EN 61000-3-2
Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	-25...+40 °C, ...+50 °C derating (storage temperature -25...+85 °C)
Relative humidity	5...95%, no condensation
Efficiency	82%
Dimensions HxWxD	76x38x87.5 mm
Output	

Output voltage	24 V DC (SELV), $\pm 1\%$; 22...28 V adjustable
LED display	LED (green) for output voltage
Output current	1.3 A (+60 °C, U_{in} min. 170 V AC)
Mains failure bridging time	min. 15 ms (100 V AC); min. 100 ms (230 V AC)
Ripple	max. 50 mV eff/rms
Spikes	max. 120 mV ss/pp
Unit protection	short-circuit and overload protected
Parallel usage/serial usage	max. 5 units/max. 2 units

Input

Input voltage	90...265 V AC/110...300 V DC
Primary fusing external	max. 10 A
Input current	0.65 A (100 V AC); 0.37 A (230 V AC)
Inrush current after 1 ms	max. 20 A
Frequency	50...60 Hz

Product article number of manufacturer	85161
--	-------