



MST 1-PHASE SAFETY TRANSFORMER

P: 320VA IN: 230/400VAC OUT: 24VAC

Single-phase safety transformer  
320 VA  
Spring clamp terminals  
Isolation class T 40/B  
Other voltages on request.

Link to Product

Illustration

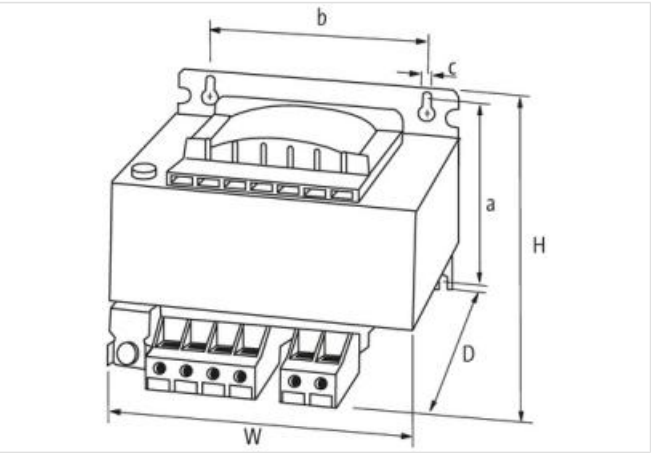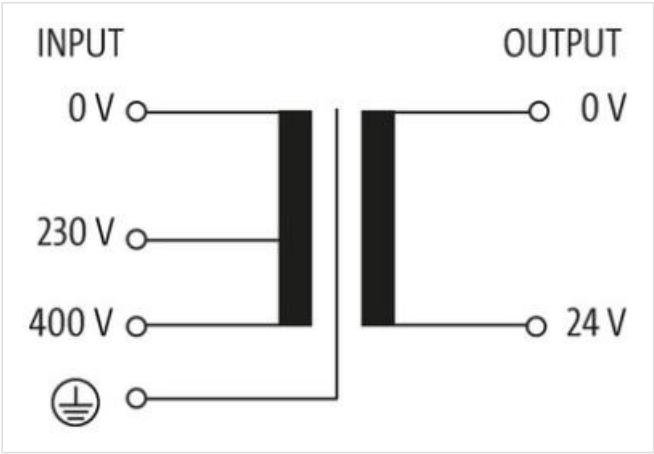

Product may differ from Image



General data	
Standards	EN 61558-1, EN 61558-2-6, EN 62041 category 0
Mounting method	Key-hole mounting
Temperature range	-20...+40 °C (storage temperature -40...+80 °C)
Test isolation voltage	4 kV (prim./sec.)
Drill hole Ø	5.8×10 mm

Fixing centers a×b×c	74.4×90×5.8 mm
Dimensions H×W×D	92.2×120×122.4 mm

**Output**

Output voltage	24 V AC (SELV)
Output rating	320 VA

**Input**

Input voltage	230/400 V AC
Inrush current	17.5 A (230 V AC); 10.1 A (400 V AC)
Short-circuit current	28 A (230 V AC); 16.1 A (400 V AC)
Input current	1.52 A (230 V AC); 0.88 A (400 V AC)
Frequency	50...60 Hz

Product article number of manufacturer	6686326
--	---------