



**MTS 1-PHASE SAFETY TRANSFORMER**

P: 63VA IN: 230/400VAC +/- 15VAC OUT: 24VAC

Single-phase safety transformer  
63 VA  
Spring clamp terminals  
Isolation class T 40/B  
Other voltages on request.

[Link to Product](#)

Illustration

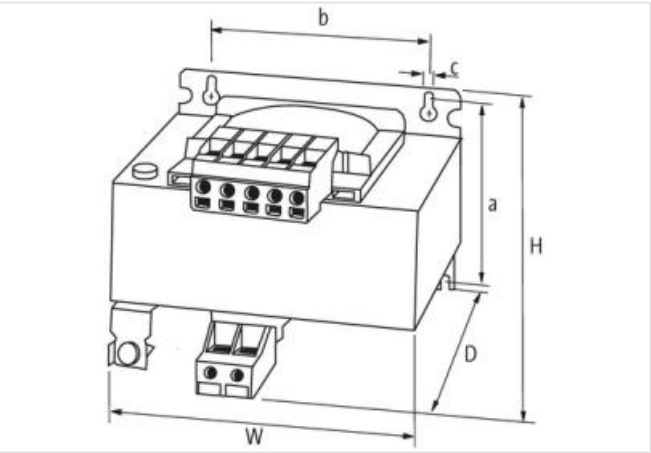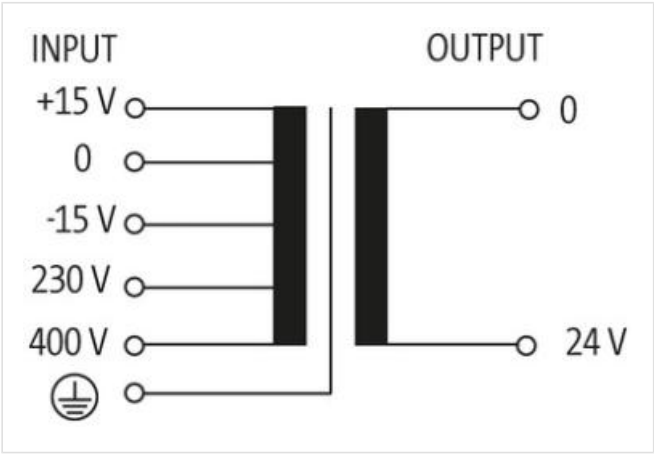

Product may differ from Image



General data	
Standards	EN 61558-1, EN 61558-2-6, EN 62041 category 0
Mounting method	Long-hole mounting or DIN-rail mountable TH35 (EN 60715)
Temperature range	-20...+40 °C (storage temperature -40...+80 °C)
Test isolation voltage	4 kV (prim./sec.)
Drill hole Ø	4.8x8.4 mm

Fixing centers a×b×c	56×56×4.8 mm
----------------------	--------------

Dimensions H×W×D	79×78×93 mm
------------------	-------------

**Output**

Output voltage	24 V AC (SELV)
----------------	----------------

Output rating	63 VA
---------------	-------

**Input**

Input voltage	230/400 ±15 V AC
---------------	------------------

Inrush current	2 A (230 V AC); 1.15 A (400 V AC)
----------------	-----------------------------------

Short-circuit current	2.95 A (230 V AC); 1.7 A (400 V AC)
-----------------------	-------------------------------------

Input current	0.33 A (230 V AC); 0.2 A (400 V AC)
---------------	-------------------------------------

Frequency	50...60 Hz
-----------	------------

Product article number of manufacturer	6686361
--	---------