

## MET 1-PHASE CONTROL AND ISOLATION TRANSFORMER


P: 2000VA IN: 230VAC+/- 5% OUT: 230VAC


Single-phase - Control and Isolation Transformers 2000 VA Spring clamp terminals Isolation class T 40/B

## **Link to Product**

## Illustration



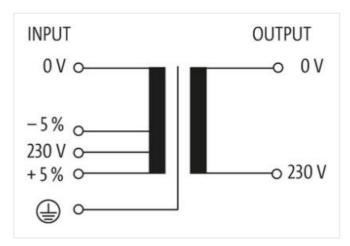



Product may differ from Image



General data	
Standards	EN 61558-1, EN 61558-2-4, EN 62041 category 0
Mounting method	Long-hole mounting
Temperature range	-20+40 °C (storage temperature -40+80 °C)
Test isolation voltage	4 kV (prim./sec.)
Drill hole Ø	9×14 mm
Fixing centers a×b×c	200×174×9 mm

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13



stay connected

Dimensions H×W×D	170×195×250 mm
Output	
Output voltage	230 V AC
Output rating	2000 VA
Input	
Input voltage	230 V AC ±5%
Inrush current	142.2 A (230 V AC)
Short-circuit current	334.8 A (230 V AC)
Input current	9.2 A (230 V AC)
Frequency	5060 Hz
Product article number of manufacturer	6686070