

## Mico Pro Potential distributor 2 x 12


Multipliing one channel 11-times, max 20 A

Mico Pro® PD 2× 12 1 channel (x 11) Build your own Mico Pro® online: https://micopro.murrelektronik.com

## **Link to Product**

## Illustration



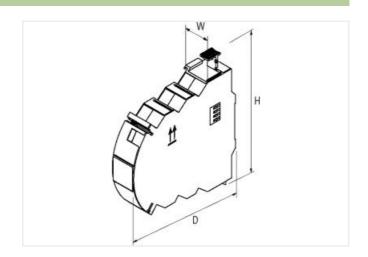

Product may differ from Image









General data	
Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	-25+55 °C (storage temperature -40+80 °C)
Protection	IP20
Dimensions H×W×D	130×24×114 mm
Bridging concept	Bridge set (max. 40 A)
Input	
Operating voltage	12 V DC; 24 V DC
Total current	max. 20 A
Connections (IN)	
Connection	Bridge system
Connections (OUT)	
Cross section (flex)	0.22.5 mm² (AWG 2414)
Connection	Push-In spring clamp terminals
Cross section (rigid)	0.22.5 mm² (AWG 2414)
Product article number of manufacturer	9000-41000-0000212