
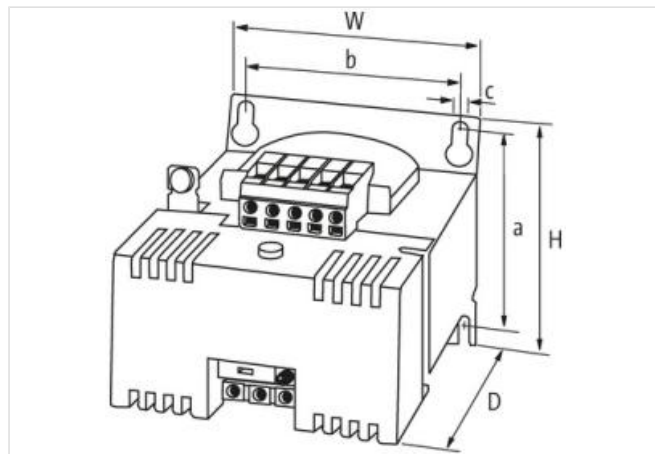


IN: 230/400+/-15VAC OUT: :24V/1ADC

**Link to Product**

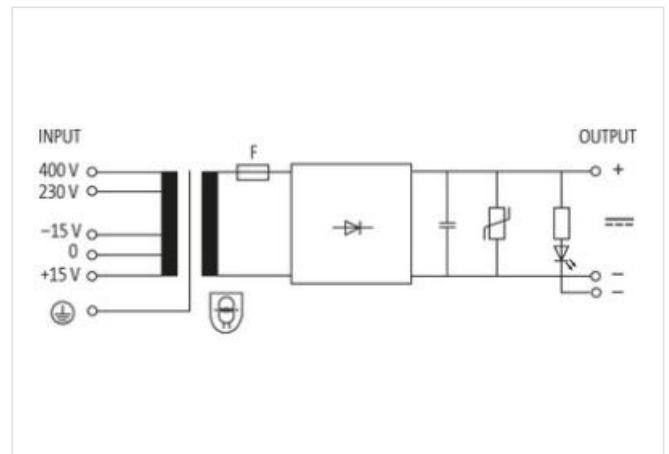

|                      |                                                                |
|----------------------|----------------------------------------------------------------|
| Standards            | EN 61558-2-6, EN 62041 category I, EN 55011 B, EN 61000-3-2    |
| Mounting method      | DIN-rail mountable TH35-15 (EN 60715) or for key-hole mounting |
| Temperature range    | -20...+60 °C, no condensation                                  |
| Fixing centers a×b×c | 47.5×56×4.8 mm                                                 |
| Dimensions H×W×D     | 64×78×120 mm                                                   |

The information in this brochure has been compiled with the utmost care.  
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | [shop@murrinc.com](mailto:shop@murrinc.com) | [shop.murrinc.com](http://shop.murrinc.com)

|                                        |                                             |
|----------------------------------------|---------------------------------------------|
| Output voltage                         | 24 V DC (SELV)                              |
| Output current (Ta 60/40 °C)           | max. 1 A (230 V AC); 1.5 A (400 V AC)       |
| Output suppression                     | LED, VDR and smoothing capacitor            |
| Output fuse                            | 3 A (automotive fuse FKS)                   |
| Ripple                                 | max. 5% eff/rms                             |
| <b>Input</b>                           |                                             |
| Input voltage                          | 230/400 ±15 V AC                            |
| Input fuse (external)                  | 0.4 A (T) (230 V AC); 0.25 A (T) (400 V AC) |
| Input current                          | 0.25 A (230 V AC); 145 A (400 V AC)         |
| Frequency                              | 50...60 Hz                                  |
| Product article number of manufacturer | 8985349                                     |