
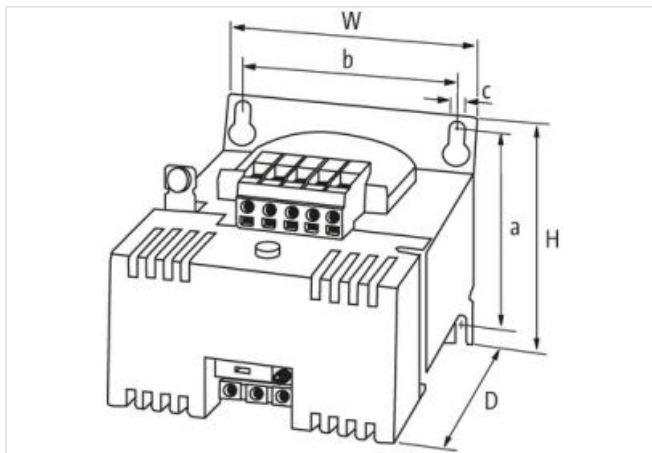
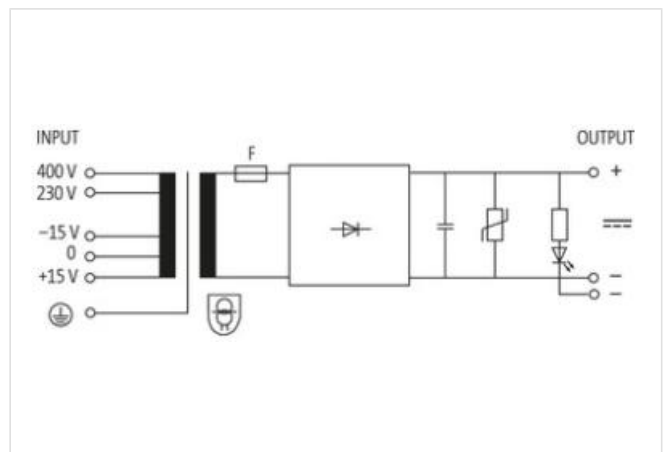


IN: 230/400+/-15VAC OUT: 24V/2,5ADC

This power supply units meet the (EN 61000-3-2) standard for harmonic current.

Illustration



Standards	EN 61558-2-6, EN 62041 category I, EN 55011 B, EN 61000-3-2
Mounting method	Key-hole mounting
Temperature range	-20...+60 °C, no condensation
Fixing centers a×b×c	65.5×64×4.8 mm
Dimensions H×W×D	83×84×124 mm

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Output voltage	24 V DC (SELV)
Output current (Ta 60/40 °C)	max. 2.5 A (230 V AC); 3 A (400 V AC)
Output suppression	LED, VDR and smoothing capacitor
Output fuse	7.5 A (automotive fuse FKS)
Ripple	max. 5% eff/rms
Input	
Input fuse (external)	0.8 A (T) (230 V AC); 5 A (T) (400 V AC)
Input current	0.5 A (230 V AC); 0.28 A (400 V AC)
Frequency	50...60 Hz
Product article number of manufacturer	85350