



MPL POWER SUPPLY 3-PHASE, SMOOTHED

IN: 208-520VAC+/- 5% OUT: 24V/25ADC

Current: 25 A  
Output rating: 600 W  
This power supply units meet the (EN 61000-3-2) standard for harmonic current.

Link to Product

Illustration

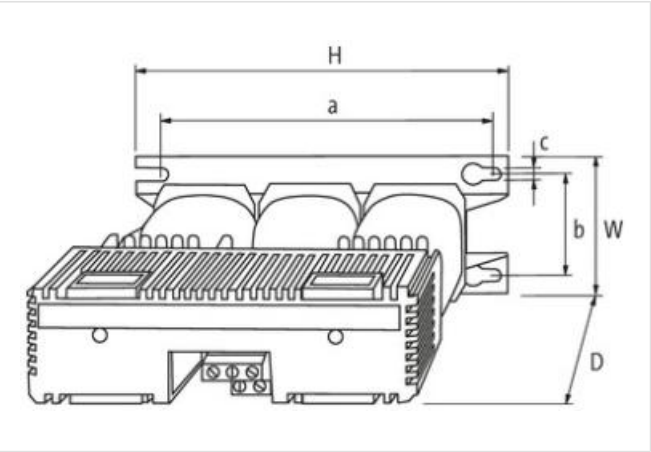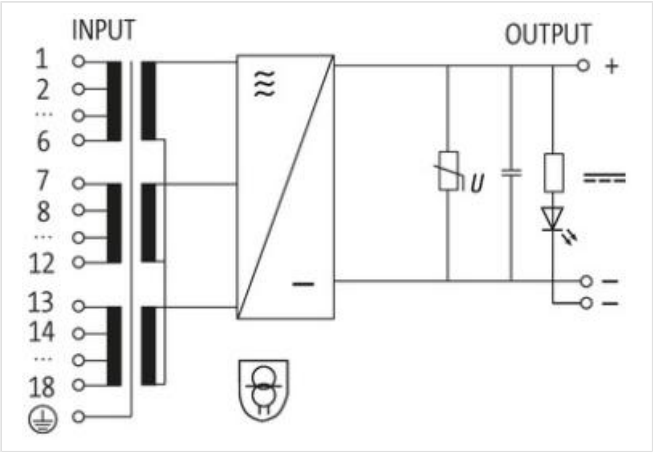

Product may differ from Image



| General data         |   |
|----------------------|---|
| Standards            | EN 61558-2-6, EN 62041 category I, EN 55011 B, EN 61000-3-2               |
| Mounting method      | Key-hole mounting   |
| Temperature range    | -20...+55 °C, for any mounting position at vertical wall, no condensation |
| Fixing centers a×b×c | 195×81×8.5 mm   |
| Efficiency           | 73%   |
| Dimensions H×W×D     | 220×101,5×213 mm  |
| Output               |   |

|  |                                  |
|--|----------------------------------|
| Output voltage                         | 24 V DC (SELV)                   |
| Output fuse external                   | 25 A T                           |
| Output suppression                     | LED, VDR and smoothing capacitor |
| Output current                         | max. 25 A                        |
| Ripple                                 | max. 2% eff/rms                  |
| <b>Input</b>                           |                                  |
| Input voltage                          | 3× 208...520 V AC                |
| Frequency                              | 50...60 Hz                       |
|  |                                  |
| Product article number of manufacturer | 85955                            |