



MICO BASIC 5.2/3.6 ELEC AUX CIRCUIT, 8 CHANNELS

IN: 24VDC OUT: 5x24V/2ADC 3x24V/6ADC

MICO BASIC 5.2/3.6
8 channels
Current adjustment 5× 2 A; 3× 6 A

Link to Product

Illustration

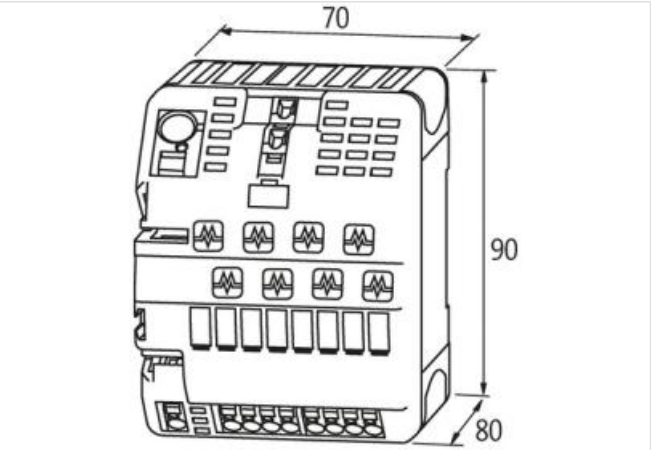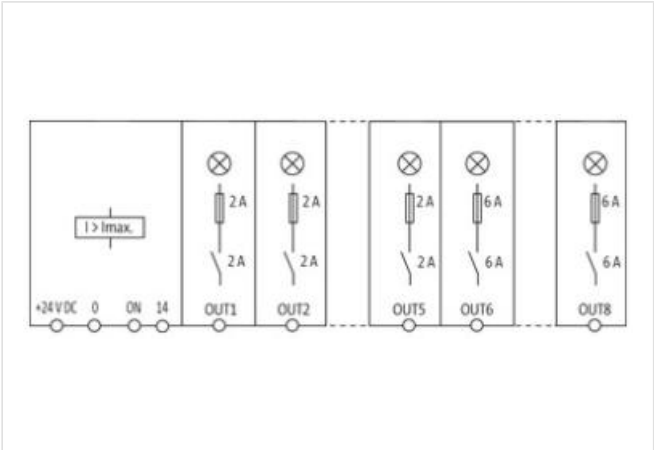

Product may differ from Image



General data	
Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	0...+55 °C (storage temperature -40...+80 °C)
Connection	Spring clamp terminals
Dimensions H×W×D	90×70×80 mm
Bridging concept	one side, with spring clamp terminals or bridge set (max. 40 A)
Output terminals	per output 1× 4 mm²
Input terminals	1× 16 mm²

Alarm terminals	2.5 mm ²
-----------------	---------------------

Output

Inrush capacity	max. 20 mF (per channel)
Current adjustment	5× 2 A; 3× 6 A

Input

Operating voltage	24 V DC (18...30 V DC)
-------------------	------------------------

Control inputs

Input voltage (ON)	10...30 V DC
Impulse length (ON)	min. 20 ms

Control outputs

Group alarm output	max. 20 mA; high: all channels ON; low: not all channels ON
--------------------	---

Product article number of manufacturer	9000-41068-0200600
--	--------------------