



MICO+ 4.10 electronic circuit protection, 4 CHANNELS

IN: 24 V DC OUT: 24 V DC / 4-6-8-10 A

MICO+ 4.10
4 channels
Current adjustment 4, 6, 8, 10 A

Link to Product

Illustration

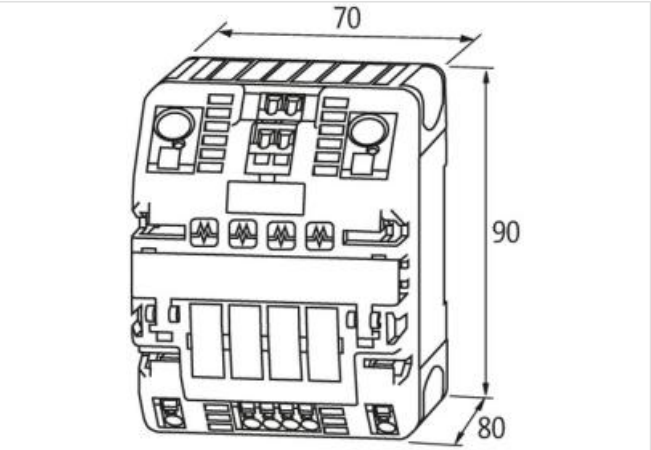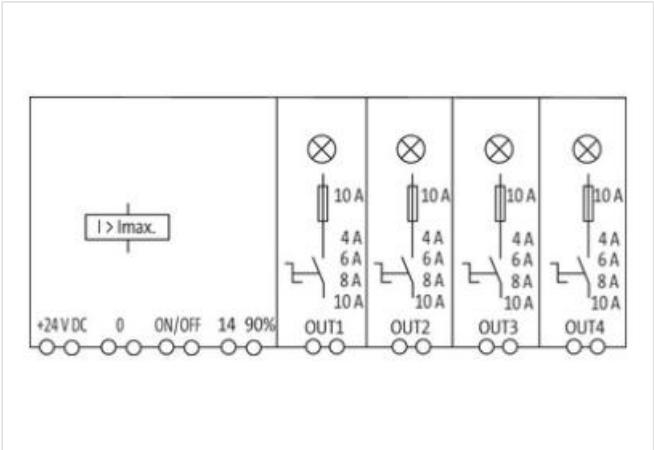

Product may differ from Image



General data	
Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	0...+55 °C (storage temperature -40...+80 °C)
Connection	Spring clamp terminals
Dimensions HxWxD	90x70x80 mm
Bridging concept	two sides, with spring clamp terminals or bridge set (max. 40 A)
Output terminals	per output 2x 1.5 mm²
Input terminals	2x 16 mm²

Alarm terminals 2.5 mm²

Output

Inrush capacity max. 20 mF (per channel)

Current adjustment 4 A, 6 A, 8 A, 10 A, by countersunked rotary switch, sealed

Input

Operating voltage 24 V DC (18...30 V DC)

Control inputs

Input voltage (ON) 10...30 V DC

Impulse length (ON) min. 20 ms

Remote start (OFF) 10...30 V DC

Control outputs

Early warning (90%) max. 20 mA; high: one channel over 90%; low: all channels under 90%

Group alarm output max. 20 mA; high: all channels ON; low: not all channels ON

Product article number of manufacturer 9000-41084-0401000