
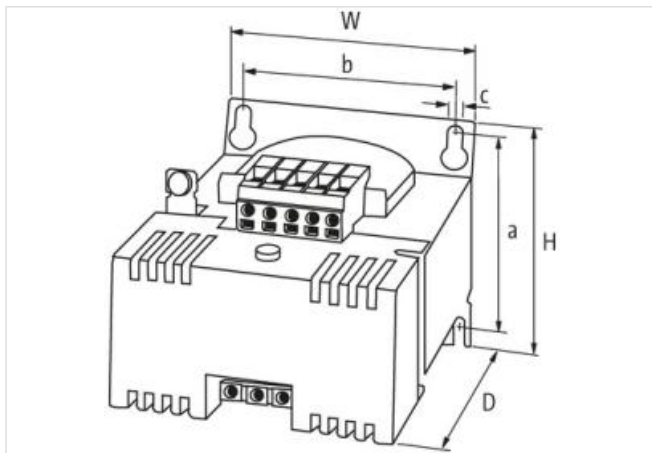



IN: 230/400+/-15VAC OUT: :24V/20ADC

This power supply units meet the (EN 61000-3-2) standard for harmonic current.

Illustration

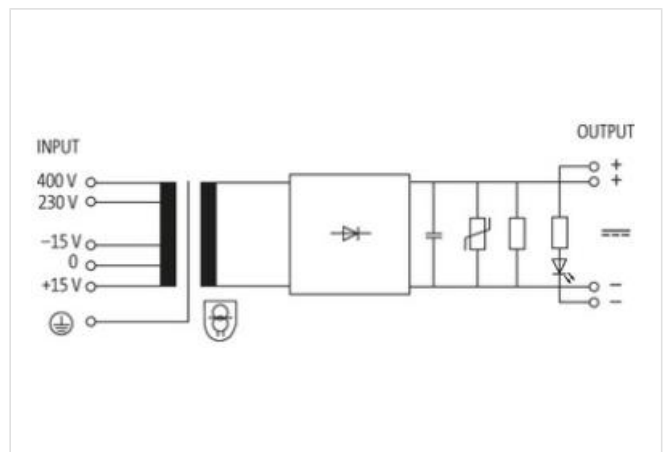

Product may differ from Image



Standards	EN 55011 A
Mounting method	Key-hole mounting
Temperature range	-20...+60 °C, no condensation
Fixing centers a×b×c	102×135×7 mm
Dimensions H×W×D	127×174×213.5 mm

Output

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Output voltage	24 V DC (SELV)
Output current (Ta 60/40 °C)	max. 20 A (230 V AC); 24 A (400 V AC)
Output suppression	LED, VDR and smoothing capacitor
Ripple	max. 5% eff/rms
Input	
Input voltage	230/400 ±15 V AC
Input fuse (external)	5 A (T) (230 V AC); 3.15 A (T) (400 V AC)
Input current	3.7 A (230 V AC); 2.15 A (400 V AC)
Frequency	50...60 Hz
Product article number of manufacturer	85354