

EMPARRO POWER SUPPLY 1-PHASE, PRIMARY SWITCHED

IN: 100-240VAC OUT: 24-28VDC/5A

INPUT: 85...265 V AC/90...250 V DC

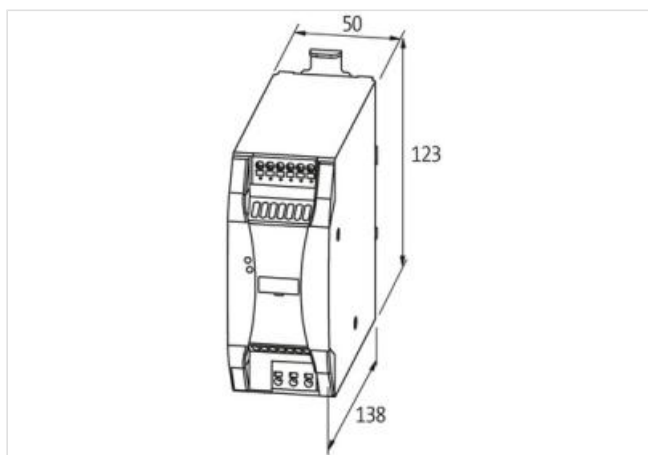
OUTPUT: 24...28 V DC

Current: 5 A

Varnished board

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Standards	IEC 61010-2-201, EN 61204-3, EN 55011 B, EN 61000-3-2, SEMI F47
Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	-40...+60 °C, ...+70 °C derating (storage temperature -40...+80 °C)
Relative humidity	5...95%, no condensation
Protection	IP20
Efficiency	92.7% (110 V AC); 94.5% (230 V AC)
Connection	Push-In spring clamp terminals
Dimensions H×W×D	123×50×138 mm

Output

Output voltage	24 V DC (SELV), ±1%; 24...28 V adjustable
Power Boost	I _{out} N × 150% (min. 4 s)
LED display	LED (green): OK; LED (red): overload, overheating or short-circuit
Output current	5 A
Mains failure bridging time	min. 30 ms (100 V AC); 5 A (24 V DC)
Ripple	max. 50 mV eff/rms
Spikes	max. 200 mV ss/pp
Unit protection	short-circuit and overload protected
Parallel usage/serial usage	max. 5 units/max. 2 units

Input

Input voltage	85...265 V AC/90...250 V DC
---------------	-----------------------------

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Input current	1.3 A (100 V AC); 0.61 A (240 V AC)
Inrush current after 1 ms	max. 5.5 A (230 V AC)
Power factor	0.87 (230 V AC)
Frequency	50...60 Hz
Input fuse (internal)	6.3 A (T)
Product article number of manufacturer	9000-11112-0921111