



MB CAP ULTRA BUFFER MODULE

IN: 12/24VDC OUT:12/24VDC/10A for max.1A/380S

INPUT: 24 V DC (SELV/PELV)
OUTPUT: max. 10 A
38 s (10 A); 380 s (1 A)

Link to Product

Illustration

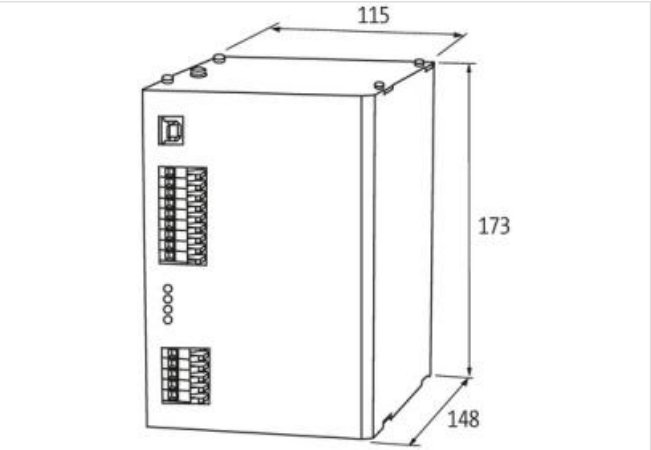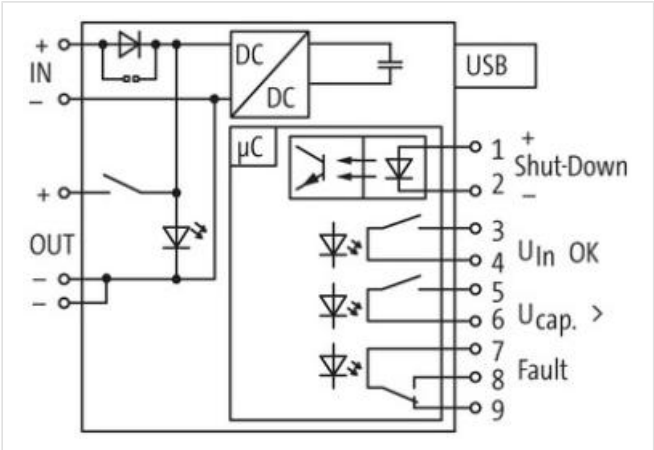

Product may differ from Image



General data	
Standards	EN 60950, EN 50178, SELV/PELV
Mounting method	DIN-rail mountable TH35-7.5/TH35-15 (EN 60715)
Temperature range	-20...+60 °C (storage temperature -20...+60 °C)
Efficiency	90%
Output	
Output voltage	11.3 V DC ±4%; 23.3 V DC ±2%

Buffer time	38 s (10 A); 380 s (1 A)
-------------	--------------------------

Output current	max. 10 A (+60 °C)
----------------	--------------------

Input

Input voltage	10.5...15 V DC; 24...27 V DC
---------------	------------------------------

Inrush current	max. 35 A/2 ms
----------------	----------------

Loading time	typ. 100 s; max. 210 s
--------------	------------------------

Input current	10 A
---------------	------

Product article number of manufacturer	85467
----------------------------------------	-------