

Mico Pro Power module

IN: 24 V DC / 40A, 16mm²

Mico Pro® PM 24 V DC/40 A

Cover plate included

Shock load

1/2 sin 30 g, 11 ms

Build your own Mico Pro® online:


<https://micopro.murrelektronik.com>

Link to Product

Illustration



Product may differ from Image

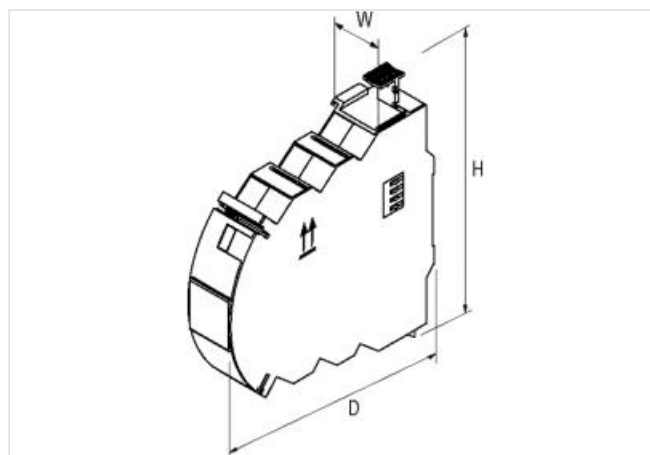

General data

Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	-25...+55 °C (storage temperature -40...+80 °C)
Protection	IP20
Dimensions H×W×D	130×24×114 mm
Bridging concept	Bridge set (max. 40 A)
Shock load	1/2 sin 30 g, 11 ms

Output

Parallel usage/serial usage	-/Selectivity in 2 levels
-----------------------------	---------------------------

Input

Operating voltage	12 V DC; 24 V DC (9...30 V DC)
Total current	max. 40 A

Connections (IN)

Connection	Bridge system
------------	---------------

Connections (OUT)

Cross section (flex)	0.75...16 mm ² (AWG 20...4)
Connection	Push-In spring clamp terminals
Cross section (rigid)	0.75...16 mm ² (AWG 20...4)

Control inputs	
Input voltage (ON)	9...30 V DC
Impulse length (CTRL)	OFF "high" 40/400 ms, ON "high" 20/200 ms
Input voltage (CTRL)	9...30 V DC
Impulse length (ON)	"high" 120 ms
Control outputs	
Early warning (90%)	max. 30 V AC/DC
Group alarm output	max. 30 V AC/DC
Product article number of manufacturer	9000-41190-0000001