



## MICO BASIC 8.2 electronic circuit protection, 8 CHANNELS

IN: 24 V DC OUT: 24 V DC / 2 A

MICO BASIC 8.2  
8 channels  
Current adjustment 2 A

### [Link to Product](#)

#### Illustration

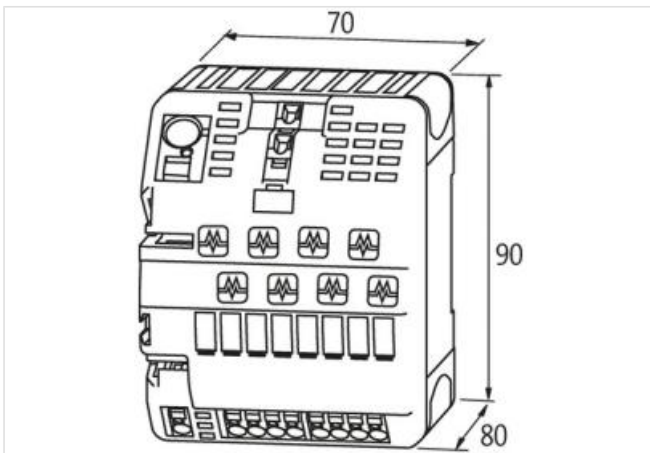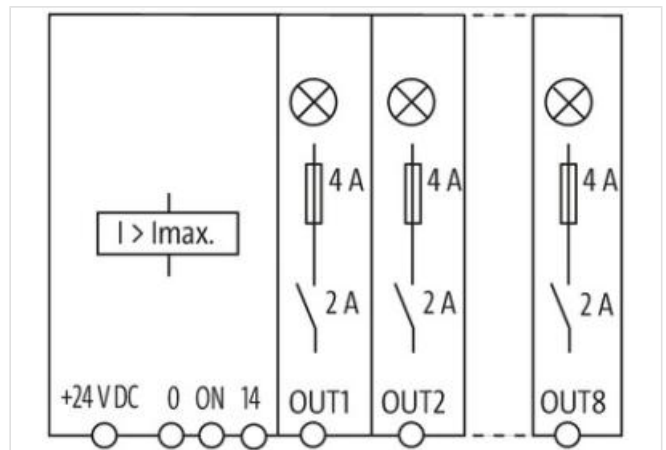

Product may differ from Image



**Class 2**  
UL1310/NEC 725



#### General data

Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	0...+55 °C (storage temperature -40...+80 °C)
Connection	Spring clamp terminals
Dimensions HxWxD	90x70x80 mm
Bridging concept	one side, with spring clamp terminals or bridge set (max. 40 A)
Output terminals	per output 1 x 4 mm <sup>2</sup>
Input terminals	1 x 16 mm <sup>2</sup>

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Alarm terminals	2.5 mm <sup>2</sup>
-----------------	---------------------

**Output**

Inrush capacity	max. 20 mF (per channel)
-----------------	--------------------------

Current adjustment	2 A
--------------------	-----

**Input**

Operating voltage	24 V DC (18...30 V DC)
-------------------	------------------------

**Control inputs**

Input voltage (ON)	10...30 V DC
--------------------	--------------

Impulse length (ON)	min. 20 ms
---------------------	------------

**Control outputs**

Group alarm output	max. 20 mA; high: all channels ON; low: not all channels ON
--------------------	---

Product article number of manufacturer	9000-41068-0200000
--	--------------------