



MDD DC/DC-CONVERTOR SWITCH MODE

IN: 24VDC OUT: 2x15V/0,25ADC

INPUT: 24 V DC  
OUTPUT: ±15 V DC  
Output rating: 7 W  
Current: 2× 0.25 A

[Link to Product](#)

Illustration

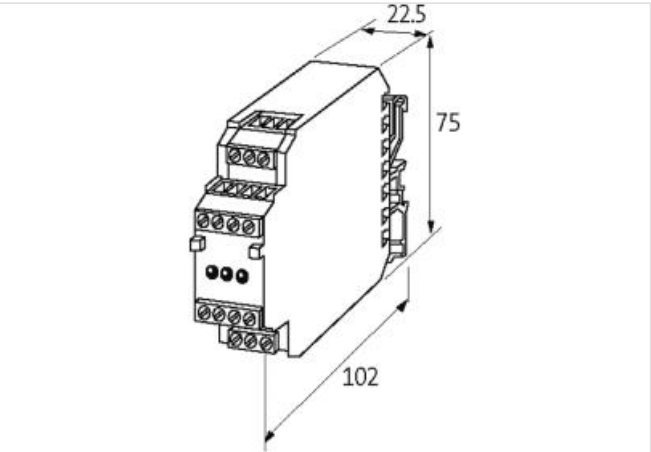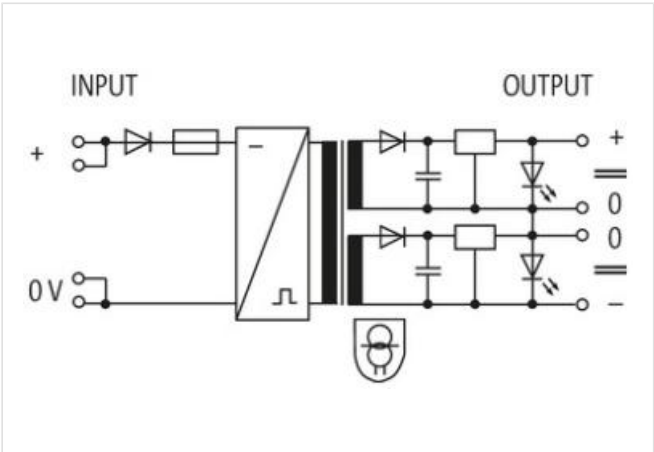

Product may differ from Image

General data	
Standards	EN 61204-3
Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	0...+50 °C, no condensation
Test isolation voltage	4 kV (input/output)
Output	
Output voltage	±15 V DC (SELV), ±5%
Output fuse	short-circuit and overload protected, restart after overload by removing power supply
Output current	max. 2× 250 mA
Ripple	max. 0.2% eff/rms
Input	

Input voltage	24 V DC
---------------	---------

Input current	0.85 A
---------------	--------

Input fuse (internal)	1.5 A (T)
-----------------------	-----------

Product article number of manufacturer	85659
--	-------