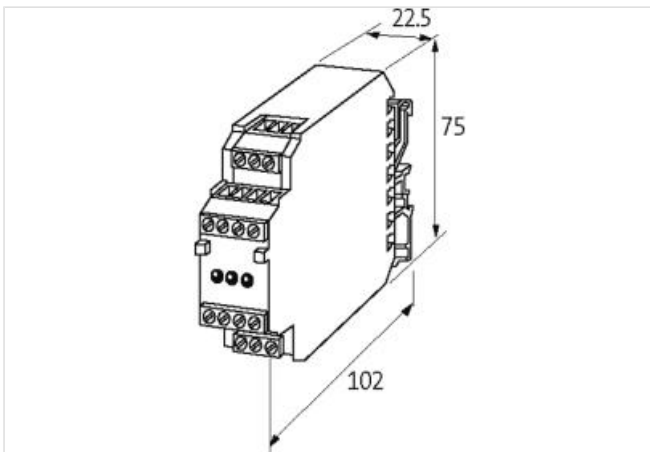
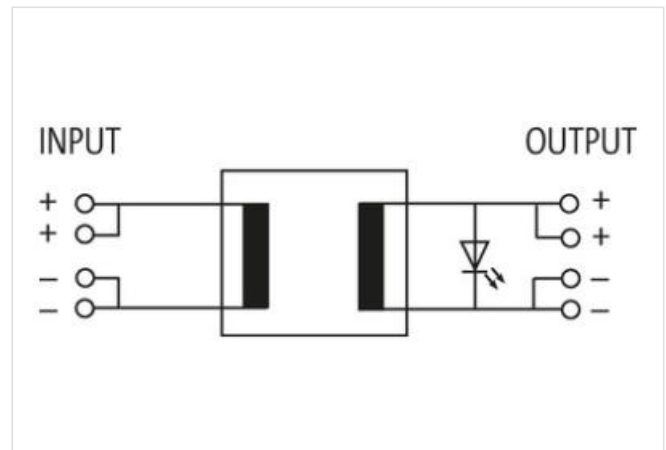


MDD DC/DC-CONVERTOR SWITCH MODE

IN: 24VDC OUT: 12V/0,7ADC

INPUT: 24 V DC
 OUTPUT: 12 V DC
 Output rating: 8 W
 Current: 0.7 A

[Link to Product](#)**Illustration**

Product may differ from Image

General data

Standards	EN 61204-3
Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	0...+50 °C, no condensation
Test isolation voltage	4 kV (input/output)

Output

Output voltage	12 V DC (SELV), ±2%
Output fuse	short-circuit and overload protected, restart after overload by removing power supply
Output current	max. 0.7 A
Ripple	max. 0.2% eff/rms

Input

Input voltage	24 V DC
---------------	---------

Input fuse (external)	2 A (T)
-----------------------	---------

Input current	0.6 A
---------------	-------

Input fuse (internal)	1.5 A (T)
-----------------------	-----------

Product article number of manufacturer	85656
--	-------