

MSVD POWER SOCKET NEMA (GFCI)

Mounting rail

USA (2x NEMA-GFCI 5-15)
(Ground Fault Circuit Interrupter)
Screw terminals


Each socket can be loaded with 20 A, however, the total load of both sockets must be below 30 A.

[Link to Product](#)

Illustration



Product may differ from Image

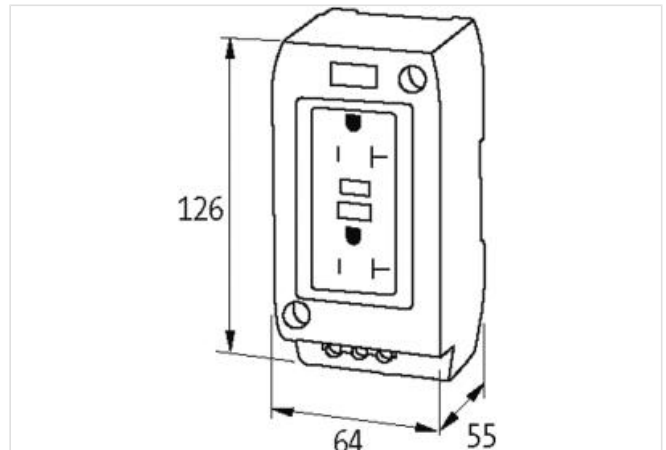

Technical Data

| | |
|-------------------|-----------|
| Operating voltage | 125 V AC |
| Operating current | max. 15 A |
| Trip level | 4...6 mA |

General data

| | |
|------------------|---|
| Mounting method | DIN-rail mountable (EN 60715) |
| Connection | Screw terminals: max. 6 mm ² |
| Dimensions H×W×D | 126×64×55 mm |

| | |
|--|-------|
| Product article number of manufacturer | 67980 |
|--|-------|