

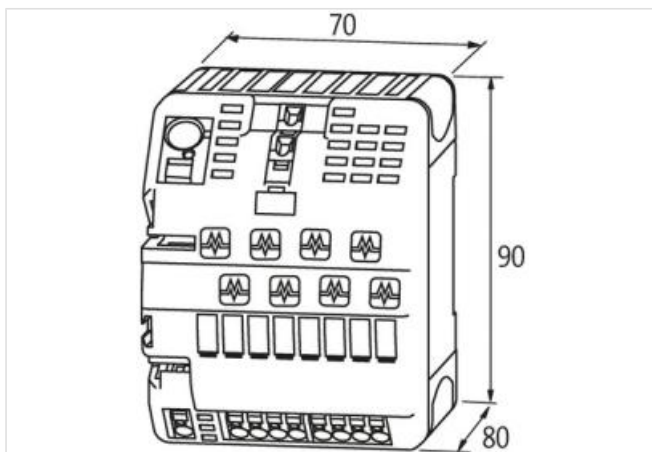
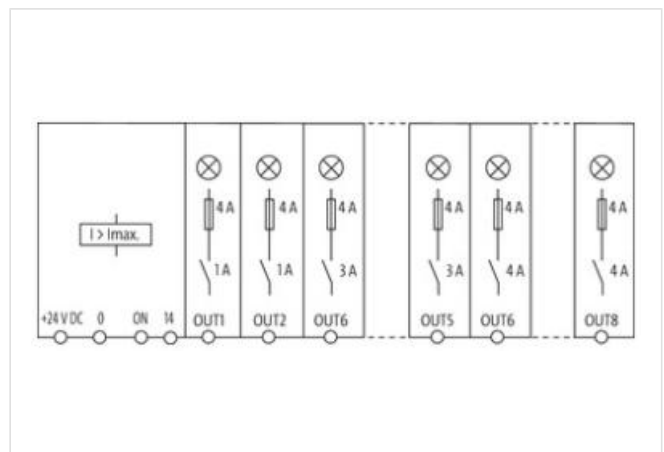
MICO Basic 2.1/3.2/3.4 electronic circuit protection, 8 CHANNELS

IN: 24 V DC OUT: 24 V DC / 2 x 1 A & 3 x 2 A & 3 x 4 A

MICO BASIC 2.1/3.2/3.4

8 channels

Current adjustment 2x 1 A; 3x 2 A; 3x 4 A

[Link to Product](#)**Illustration**

Product may differ from Image

General data

Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	0...+55 °C (storage temperature -40...+80 °C)
Connection	Spring clamp terminals
Dimensions HxWxD	90x70x80 mm
Bridging concept	one side, with spring clamp terminals or bridge set (max. 40 A)
Output terminals	per output 1 x 4 mm ²
Input terminals	1 x 16 mm ²
Alarm terminals	2.5 mm ²

Output

Inrush capacity	max. 20 mF (per channel)
Current adjustment	2x 1 A; 3x 2 A; 3x 4 A

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Input	
Operating voltage	24 V DC (18...30 V DC)
Control inputs	
Input voltage (ON)	10...30 V DC
Impulse length (ON)	min. 20 ms
Control outputs	
Group alarm output	max. 20 mA; high: all channels ON; low: not all channels ON
Product article number of manufacturer	9000-41068-0100304