

SIEMENS CONTACTOR SUPPRESSOR


RC, 110VAC/DC


48 V AC/DC 110 V AC/DC RC For other configurations and voltages, please inquire.

Link to Product

Illustration



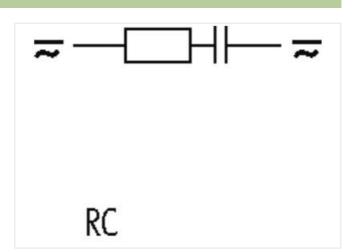



Product may differ from Image



48127 V AC/DC
Flame retardant plastic acc. to (UL 94)
approx. 1.5× UN
self-securing cable forks
-

The information in this brochure has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com



Temperature range	-20+70 °C
Dimensions H×W×D	11×27×24 mm
Appropriate contactors	
	3 TH 3/4/8; 3 TF 3045; 3 TB 403 TB 44

Product article number of manufacturer 22051

The information in this brochure has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com