



MOTOR SUPPRESSOR

RC, 3x575VAC/45kW

RC single
1 suppression module per phase required
For DIN-rail mounting use 2×Art.-No. 20900 adapter feet
Suppressors for other voltages, frequencies, and motor ratings available on request. Do not use RC motor suppressors with frequency inverters.

Link to Product

Illustration

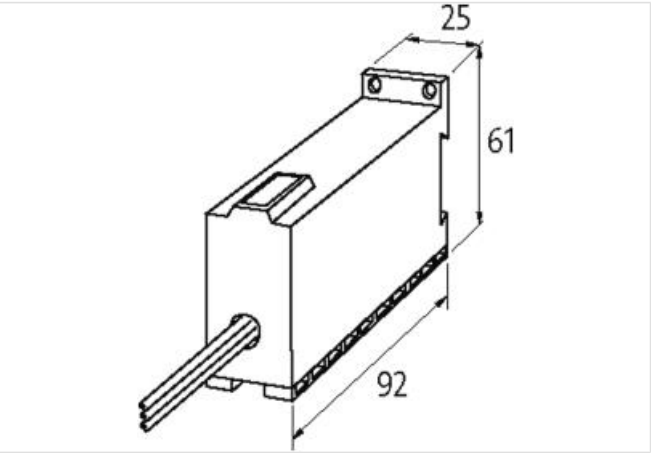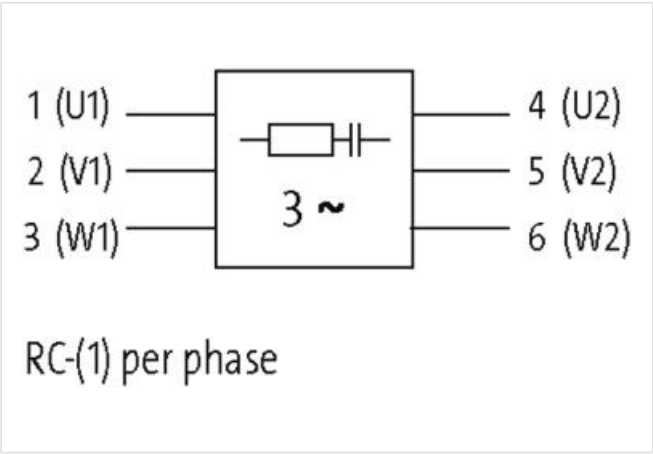

Product may differ from Image

Technical Data	
Frequency	50...60 Hz
Input voltage	575...575 V AC
Material	Flame retardant plastic acc. to (UL 94)
Potting compound	2-component epoxy
General data	
Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	-20...+60 °C
Connection	approx. 500 mm, single cores 1 mm²
Dimensions H×W×D	92×61×25 mm

Product article number of manufacturer 23103