

GSS DC/DC-CONVERTOR SWITCH MODE

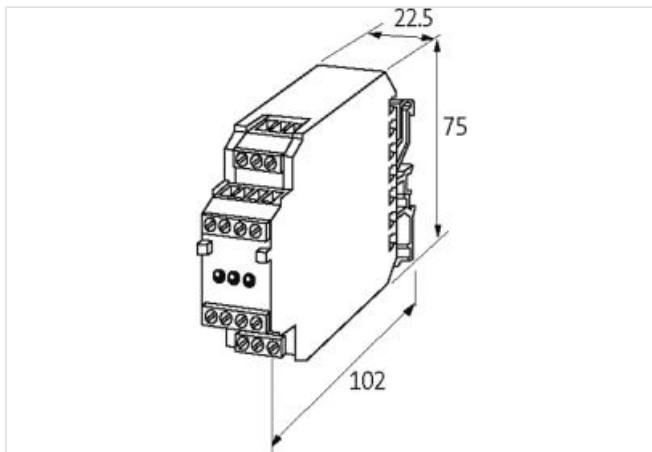
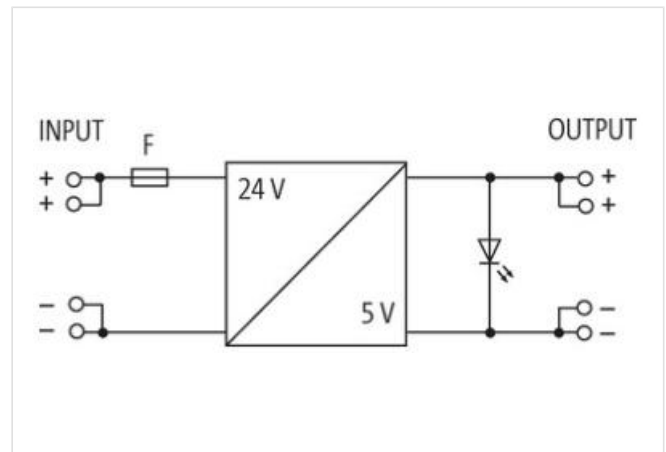
IN: 15-40VDC OUT: 5V/4ADC

INPUT: 24 V DC

OUTPUT switched mode: 5 V DC

Output rating: 20 W

Current: 4 A

[Link to Product](#)**Illustration**

Product may differ from Image

General data

Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	-20...+60 °C, no condensation

Output

Output voltage	5 V DC (SELV), ±5%
Output fuse	Short-circuit protected
Output current	max. 4 A
Ripple	max. 0.2% eff/rms

Input

Input voltage	15...40 V DC
Input current	1.04 A (24 V DC); max. 1.7 A

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Input fuse (internal)	2 A (T)
-----------------------	---------

Product article number of manufacturer	85650
--	-------