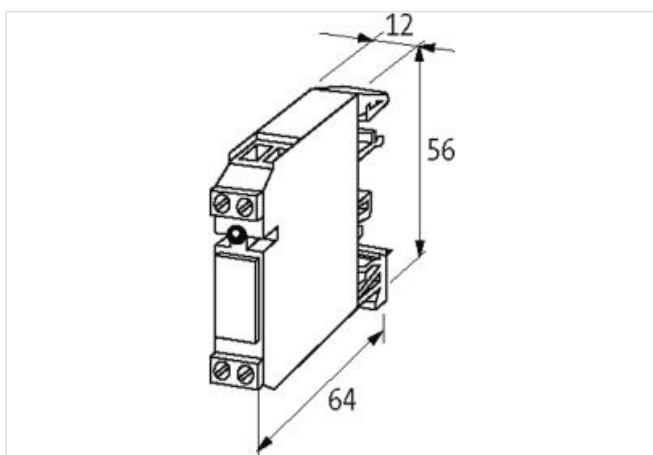
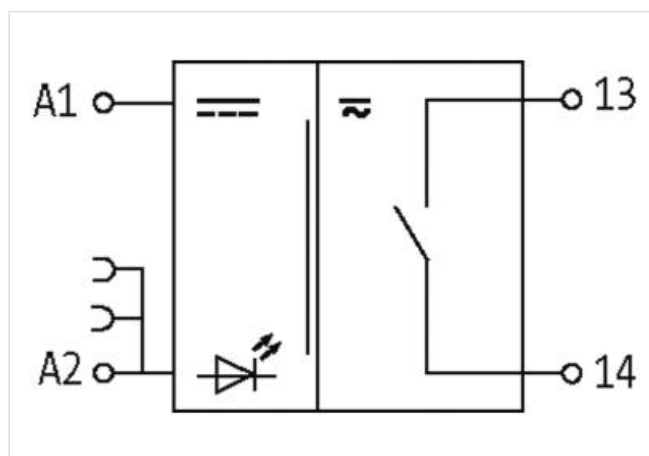


**RMM 11/24VDC WITH GROUND BRIDGE OUTPUT RELAY**

IN: 24 VAC/DC - OUT: 250 VAC/DC / 5 A

1 relay; 1 NO contact  
 5 A  
 24 V AC/DC  
 with minus plug link  
 Screw terminals

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	-25...+60 °C (storage temperature -40...+80 °C)
Test isolation voltage	4.0 kV
Mech./ elect. life	10 000 000 switching cycles/load dependent
Dimensions H×W×D	56×12×65 mm

**Output**

Min. load current	100 mA
Contact material	Ag Ni 0.15 hv
Energize/release/contact bounce time	10/15/1.5 ms

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Switching voltage	max. 250 V AC/DC
Switching frequency	max. 10 Hz
Power rating (voltage dependent)	max. 1250 VA/240 W
Switching current per output	max. 5 A

**Input**

Plug link (supplied)	Art-No. 90960
Connection voltage - current	24 V AC/DC (19.2...30 V AC/DC) - 15 mA
LED display	LED (red)

**Utilization category**

AC-15	3 A (24/110/230 V AC)
AC-1	5 A (24/110/230 V AC)
DC-13	1.5 A (24 V DC); 0.3 A (110 V DC); 0.15 A (230 V DC)

Product article number of manufacturer	51851
--	-------