

MOTOR SUPPRESSOR

Varistor, 3x400VAC/4kW

3× 400 V AC


VDR

isolated M4

Suppressors for other voltages, frequencies, and motor ratings available on request. Do not use RC motor suppressors with frequency inverters.

Link to Product

Illustration

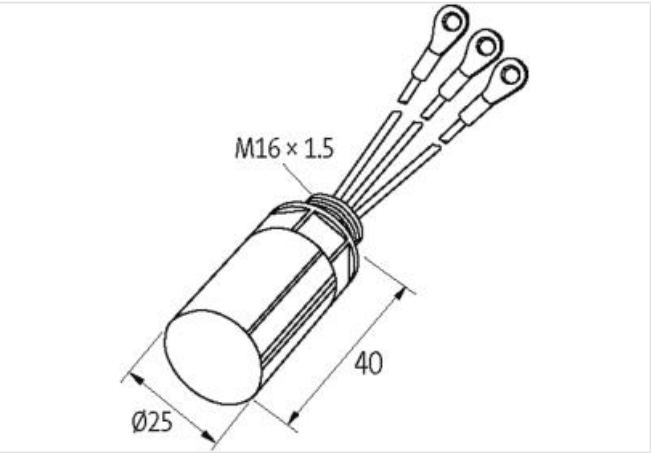

Product may differ from Image



Technical Data	
Frequency	10...400 Hz
Input voltage	400...400 V AC
Material	Flame retardant plastic acc. to (UL 94)
Ring terminals	isolated M4
Potting compound	2-component epoxy

General data	
Mounting method	on motor terminal box with plug connector
Temperature range	-20...+60 °C
Connection	approx. 100 mm, single cores 0.5 mm <sup>2</sup>
Dimensions H×W×D	25×25×40 mm
Product article number of manufacturer	23119