



**RMMDAH-CTL 11/24 OUTPUT RELAY WITH TOGGLE SWITCH**

IN: 24 VDC - OUT: 250 VAC/DC / 8 A

- 1 relay; 1 NO contact
- 8 A
- 24 V DC
- CTL alarm output
- with minus plug link
- Screw terminals

[Link to Product](#)

Illustration

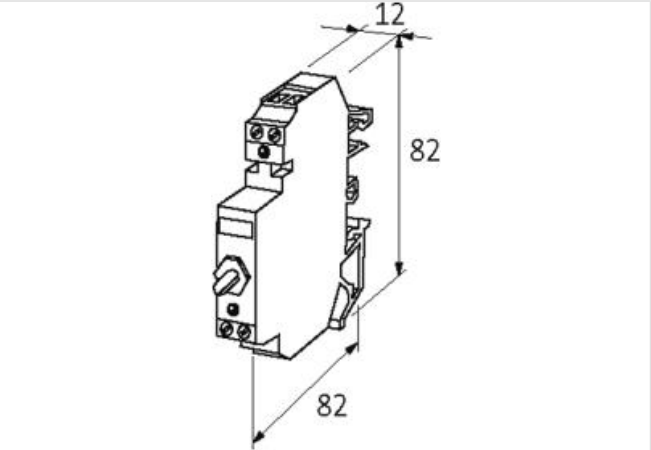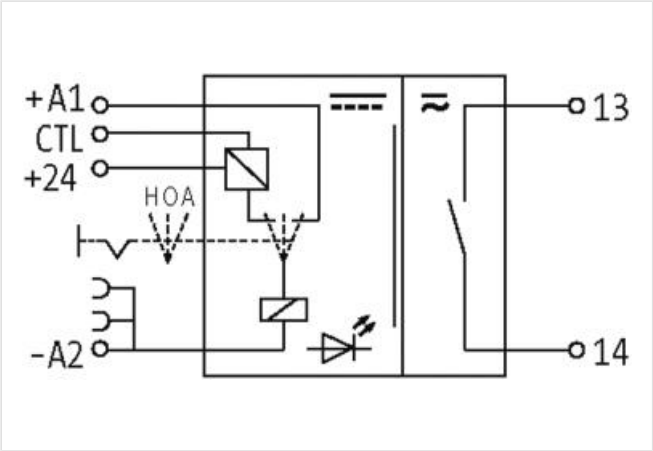

Product may differ from Image

General data	
Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	-20...+50 °C
Test isolation voltage	4.0 kV
Mech./ elect. life	30 000 000 switching cycles/load dependent
Dimensions HxWxD	82x12x82 mm
Output	
Min. load current	100 mA
Contact material	Ag Ni

Energize/release/contact bounce time	10/10/2 ms
Switching voltage	max. 250 V AC/DC
Switching frequency	max. 15 Hz
Power rating (voltage dependent)	max. 2000 VA/240 W
Switching current per output	max. 8 A; CTL: 10 mA

**Input**

Plug link (supplied)	Art-No. 90960
Connection voltage - current	24 V DC (19.2...30 V DC) - 16 mA
LED display	LED (red)

**Utilization category**

AC-15	3 A (24/110/230 V AC)
AC-1	8 A (24/110/230 V AC)
DC-13	1.5 A (24 V DC); 0.3 A (110 V DC); 0.15 A (230 V DC)

Product article number of manufacturer	51153
--	-------