

TELEMECANIQUE CONTACTOR SUPPRESSOR

RC, 400VAC/DC


400 V AC/DC

RC

For other configurations and voltages, please inquire.

[Link to Product](#)

Illustration

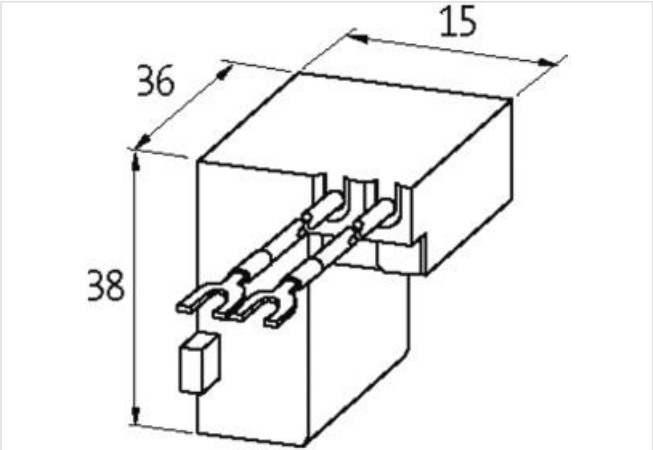

Product may differ from Image



Technical Data	
Input voltage	253...450 V AC
Material	Flame retardant plastic acc. to (UL 94)
Damping factor	approx. 1.5× UN
Connection wires	self-securing cable forks
General data	
Temperature range	-20...+70 °C

Dimensions H×W×D 15×36×38 mm

Appropriate contactors

LC 1 D09...D38, LC 1 DT20, DT40, LC 2 D09...D38

Product article number of manufacturer 2000-69400-5320000